


RCC STAGING FOR OVERHEAD WATER TANK

AT $\frac{132}{33}$ KV KARIMGANJ GSS

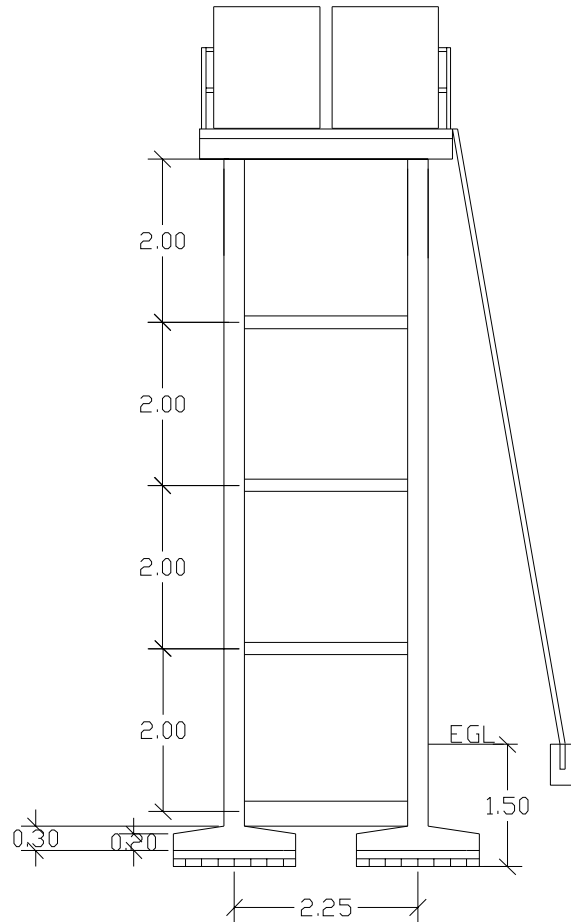

DETAILS OF MEMBERS & SCHEDULE OF REINFORCEMENT

SL NO	MEMBER	DIMENSION	NO. OF REINFORCEMENT	DIA OF REINFORCEMENT	
1	FOOTING	1.5MX1.5MX0.3M	10-BOTH WAYS	12MM	
2	T.BEAM	0.25MX0.30M	4	16MM	8MMM DIA STIRRUPS @ 150C/C
3	COLUMN	0.25MX0.25M	4	16MM	8MMM DIA STIRRUPS
			4	12MM	@ 150C/C
4	MID BEAM	0.15MX0.15M	4	12MM	8MMM DIA STIRRUPS @ 150C/C
5	ROOF BEAM	0.25MX0.25M	4	16MM	8MMM DIA STIRRUPS
			2	12MM	@ 150C/C
6	SLAB	3.1MX3.1MX0.12M	8MM DIA BAR @150MM C/C BOTH WAYS DOUBLE LAYER		

LADDER MEMBERS: (65X65X5)MM GI ANGLES
ALL DIMENSIONS ARE IN M UNLESS OTHERWISE MENTIONED