
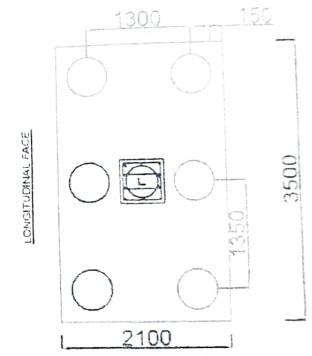



DB+0 TYPE

Notes -

1. DIMENSIONS NOT TO SCALE.
2. ALL DIMENSIONS ARE IN MM.
3. CONCRETE MIX USE M20 FOR PEDESTAL AND M25 FOR PILE CAP AND PILE, FOR LEAN CONCRETE MIX USE M10.
4. REINFORCEMENT STEEL : Fe500
5. 750mm FROM THE TOP OF THE PILE SHOULD BE BROKEN.
6. MS LINER OF 4MM THICK SHALL BE PROVIDED IN PILES UP TO 8 METRE DEPTH.



**TRANSVERSE FACE
PILE CAP PLAN FOR
EACH TOWER LEG**

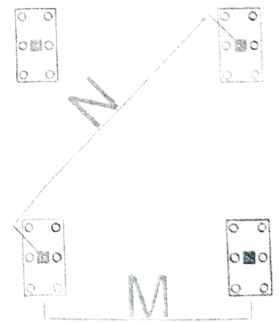

[Handwritten signature]
 Deputy Chief Engineer
 Pile Foundation for LOC 69 of Salakati APM line