

**BIDDING DOCUMENT
FOR**

**“Turnkey Construction of one no. of 33kV Feeder Bay including Civil Works at
132kV Sipajhar GSS, AEGCL for providing power to NRL”**

FUND: “Deposit Scheme”



(E-Tender)

(VOL – II)

BID IDENTIFICATION NO:

AEGCL/MD/Tech-274/O&M(LAR)/2023/Sipajhar GSS/BID

**ASSAM ELECTRICITY GRID
CORPORATION LIMITED**

Rs.1000

Section	<u>MAIN CONTENTS</u>	Page No.
Section - 4	Technical Specification	3

Section - 4

Technical Specification

(This Section contains the Technical Requirements and supplementary information that describe the Goods and Related Services)

4.1.0 SCOPE AND GENERAL TECHNICAL CONDITIONS

4.1.1 INTENT OF THE SPECIFICATION

This volume of the specification deals with the general technical information & criteria for design, manufacture and delivery of equipment/material.

The provisions of this section shall supplement all the detailed Technical Specifications and requirements brought out herein. The Supplier's proposal shall be based on the use of materials complying fully with the requirements specified herein.

4.1.1.1 SCOPE

The work involves design, engineering, manufacture, assembly, inspection, testing at manufacturer's works before dispatch, packing, supply, including insurance during transit, delivery at site of various equipment and materials including substation steel structures as specified in subsequent Clauses and Sections.

It is not the intent to specify completely herein all details of design and construction of the equipment and accessories. However, the equipment and accessories shall conform in all respects to high standards of engineering, design and workmanship and be capable of performing in continuous operation up to the bidder's guarantees in a manner acceptable to the Purchaser. The Purchaser will interpret the meaning of drawings and specifications and shall be entitled to reject any work or material, which in his judgment is not in full accordance therewith.

The brief description of the scope covered under this bidding document is furnished below:

The major items of works included in the scope of this specification are listed below: -

- Construction of 33KV feeder Bay along with all associated civil works as per BoQ and bid specification on turnkey basis.

The brief description of the scope covered under this bidding document is furnished below:

- Survey, Design, engineering, manufacture, assembly and testing at manufacturer's works of 33kV terminal equipment and different substation materials.
- Construction of outdoor cable trenches to link the existing cable trenches, kiosk etc. as per drawings and specification.
- Construction of 33KV feeder Bay along with all associated civil works as per BoQ and bid specification on turnkey basis.
- The price quoted shall include cost of all materials and labour to complete the job in all respect as per drawings and this Section.
- Loading at manufacturer's works, transportation and delivery at respective substation sites, including unloading at destination sites.
- Erection, Testing and commissioning of the supplied equipment and structures including construction of foundation and associated civil and electrical works needed for completion of the project and subsequent commissioning of the bay and integration to existing Substation Automation System (SAS) (Make: ERL).

- Any upgradation of hardware and software for above integration shall be in the scope of contractor including license upgradation (if any). The validity of the license upgraded should be minimum for 10years.

The various items of supply are described very briefly in the schedule of Bid Form, Prices & Other Schedules and annexure. The various items as defined in these schedules shall be read in conjunction with the corresponding section in the technical specifications including amendments and, additions if any.

The tentative Bill of Quantities is furnished in Section 3: Price Schedules. The BOQ is for indicative purpose only and the bidder is required to fill up the BOQ/price schedule as given in the e-tendering portal.

4.1.2 SUPPLIER TO INFORM HIMSELF FULLY

4.1.2.1 The Supplier should ensure that he has examined the General Conditions, qualifying criteria, Specifications and Schedules as brought out in Volume-1 and this Volume and has satisfied himself as to all the conditions and circumstances affecting the contract price and fixed his price according to his own views on these matters and acknowledge that no additional allowances except as otherwise provided therein will be levied.

4.1.2.2 The Purchaser shall not be responsible for any misunderstanding or incorrect information obtained by the Supplier other than information given to the Supplier in writing by the Purchaser

4.1.3 SERVICE CONDITIONS

4.1.3.1 The plant and materials supplied shall be suitable for operation under the following climatic and other conditions:

A)	Peak ambient day temperature in still air	: 45° C
B)	Minimum night temperatures	: 0° C
C)	Reference ambient day temperature	: 45° C
D)	Relative Humidity	
	a) Maximum	:100%
	b) Minimum	: 10%
E)	Altitude	Below 1000M above MSL
F)	Maximum wind Pressure	As per IS: 802 latest codes
G)	Other data	Refer meteorological data pertaining to the locations.
H)	Seismic intensity	Zone V as per IS 1893
G)	DC voltage at 132/33KV Sipajhar GSS	110V

4.1.4 CONFORMITY WITH INDIAN ELECTRICITY RULES & OTHER LOCAL REGULATIONS:

4.1.4.1 The Supplier shall note that all substation works shall comply with the latest provisions of Indian Electricity Rules and with any other regulations. Local authorities concerned in the administration of the rules and

regulation relating to such works shall be consulted, if necessary, in regard to the rules and regulations that may be applicable.

4.1.5 STANDARDS

4.1.5.1.1 The equipment covered by this specification shall, unless otherwise stated be designed, constructed and tested in accordance with the latest revisions of relevant Indian Standards and shall conform to the regulations of local statutory authorities.

4.1.5.1.2 In case of any conflict between the standards and this specification, this specification shall govern.

4.1.5.1.3 Equipment conforming to other international or authoritative Standards which ensure equivalent or better performance than that specified under Clause 1.6.1 above shall also be accepted. In that case relevant extracts of the same shall be forwarded with the bid.

4.1.6 ENGINEERING DATA

4.1.6.1 The furnishing of engineering data by the Supplier shall be in accordance with the Bidding Document. The review of these data by the Purchaser will cover only general conformance of the data to the specifications and not a thorough review of all dimensions, quantities and details of the materials, or items indicated or the accuracy of the information submitted. This review by the Purchaser shall not be considered by the Supplier, as limiting any of his responsibilities and liabilities for mistakes and deviations from the requirements, specified under these specifications.

4.1.6.2 All engineering data submitted by the Supplier after review by the Purchaser shall or part of the contract document.

4.1.7 DRAWINGS AND DOCUMENTS FOR APPROVAL

4.1.7.1 The supplier shall submit all drawings and documents of all equipment to be supplied, including drawings of foundation, steel structure and any other drawings that may be required for successful completion of the project and get it approved by the Purchaser (AEGCL).

4.1.7.2 In addition, the following sub clauses shall also apply in respect of Contract Drawings.

4.1.7.3 All drawings submitted by the Supplier including those submitted at the time of Bid shall be with sufficient detail to indicate the type, size, arrangement, dimensions, material description, Bill of Materials, weight of each component break-up for packing and shipment, fixing arrangement required, the dimensions required for installation and any other information specifically requested in these specifications.

4.1.7.4 Each drawing submitted by the Supplier shall be clearly marked with the name of the Purchaser, the specification title, the specification number and the name of the Project. All titles, noting, markings and writings on the drawing shall be in English. All the dimensions should be to the scale and in S.I. units.

4.1.7.5 The drawings submitted for approval to the Purchaser shall be in quadruplicate. One print of such drawings shall be returned to the Supplier by the Purchaser marked "approved/approved with corrections". The Supplier shall there upon furnish the Purchaser additional prints as may be required along with one reproducible in original of the drawings after incorporating all corrections.

4.1.8 INSPECTION & INSPECTION CERTIFICATE

4.1.8.1 The Purchaser, his duly authorized representative and/or outside inspection agency acting on behalf of the Purchaser shall have, at all reasonable times, access to the premises and works of the Supplier and their sub-Supplier(s)/sub-vendors and shall have the right, at the reasonable times, to inspect and examine the materials and workmanship of the product during its manufacture.

4.1.8.2 All routine and acceptance tests whether at the premises or work of, the Supplier or of any Sub-Supplier, the Supplier except where otherwise specified shall carry out such tests free of charge. Items such as labour, materials, electricity, fuel, water, stores apparatus and instruments as may be reasonably demanded by the Purchaser/inspector or his authorized representative to carry out effectively such tests in accordance with the Contract shall be provided by the Supplier free of charge.

4.1.8.3 If desired by the Purchaser, the Supplier shall also carry out type tests as per applicable Standards for which Purchaser shall bear the expenses except in cases where such tests have to be carried out in pursuance to **Clause 1.18.3**. The Supplier is required to quote unit rates of type test charges in a separate Schedule (if such schedule is provided in the Bidding Document) in pursuance to this Clause. However, these type test charges shall not be taken into account in comparing Price Bid.

4.1.8.4 The inspection by Purchaser and issue of Inspection Certificate thereon shall in no way limit the liabilities and responsibilities of the Supplier in respect of the agreed Quality Assurance Programme forming a part of the Contract.

4.1.8.5 Tests

The type, acceptance and routine tests and tests during manufacture to be carried-out on the material and equipment shall mean as follows:

- i) Type Tests shall mean those tests, which are to be carried out to prove the process of manufacture and general conformity of the material to this Specification. These tests shall be carried out on samples prior to Commencement of commercial production against the order. The Bidder shall indicate his schedule for carrying out these tests.
- ii) Acceptance Tests shall mean those tests, which are to be carried out on samples taken from each lot offered for pre-dispatch inspection, for the purposes of acceptance of that lot.
- iii) Routine Tests shall mean those tests, which are to be carried out on the material to check requirements, which are likely to vary during production.
- iv) Tests during Manufacture shall mean those tests, which are to be carried out during the process of manufacture and end inspection by the Supplier to ensure the desired quality of the end product to be supplied by him.
- v) The norms and procedure of sampling for these tests will be as per the Quality Assurance Programme to be mutually agreed to by the Supplier and the Purchaser.

4.1.8.6 The standards and norms to which these tests will be carried out are specified in subsequent Sections of this Specification. Where a particular test is a specific requirement of this Specification, the norms and procedure of the test shall be as specified or as mutually agreed to between the Supplier and the Purchaser in the Quality Assurance Programme.

4.1.8.7 For all type and acceptance tests, the acceptance values shall be the values specified in this Specification or guaranteed by the Bidder or applicable Standards, as applicable.

4.1.9 EMPLOYER'S SUPERVISION

4.1.9.1 To eliminate delays and avoid disputes and litigation it is agreed between the parties to the Contract that all matters and questions shall be resolved in accordance with the provisions of this document.

4.1.9.2 The manufacturing of the product shall be carried out in accordance with the specifications. The scope of the duties of the Employer, pursuant to the contract, will include but not be limited to the following.

- (a) Interpretation of all the terms and conditions of these Documents and Specifications.
- (b) Review and interpretation of all the Contractors drawings, engineering data etc.
- (c) Witness or authorize his representative to witness tests at the manufacturer's works or at site, or at any place where work is performed under the contract.
- (d) Inspect, accept or reject any equipment, material and work under the Contract, in accordance with the Specifications.
- (e) Issue certificate of acceptance and/or progressive payment and final payment certificate.

4.1.10 GUARANTEED TECHNICAL PARTICULARS

4.1.10.1 The Guaranteed Technical Particulars of the various items shall be furnished by the Bidders. The Bidder shall also furnish any other information's as in their opinion is needed to give full description and details to judge the item(s) offered by them.

4.1.10.2 The data furnished in Guaranteed Technical Particulars should be the minimum or maximum value (as per the requirement of the specification) required. A Bidder may guarantee a value more stringent than the specification requirement. However, for testing purpose or from performance point of view, the material shall be considered performed successfully if it achieves the minimum/maximum value required as per the technical specification. No preference what so ever shall be given to the bidder offering better/more stringent values than those required as per specification except were stated otherwise.

4.1.11 PACKING

4.1.11.1 All the materials shall be suitably protected, coated, covered or boxed and crated to prevent damage or deterioration during transit, handling and storage at Site till the time of erection. The Supplier shall be responsible for any loss or damage during transportation, handling and storage due to improper packing.

4.1.11.2 The Supplier shall include and provide for securely protecting and packing the materials so as to avoid loss or damage during transport by air, sea, rail and road.

4.1.11.3 All packing shall allow for easy removal and checking at site. Wherever necessary, proper arrangement for attaching slings for lifting shall be provided. All packages shall be clearly marked for with signs showing 'up' and 'down' on the sides of boxes, and handling and unpacking instructions as considered necessary. Special precaution shall be taken to prevent rusting of steel and iron parts during transit by sea.

4.1.11.4 The cases containing easily damageable material shall be very carefully packed and marked with appropriate caution symbols, i.e., fragile, handle with care, use no hook etc. wherever applicable.

4.1.11.5 Each package shall be legibly marked by the-Supplier at his expenses showing the details such as description and quantity of contents, the name of the consignee and address, the gross and net weights of the package, the name of the Supplier etc.

4.1.12 CONSTRUCTION TOOLS, EQUIPMENTS ETC.

4.1.12.1 The Contractor shall provide all the construction equipment, tools, tackle and scaffoldings required for construction, erection, testing and commissioning of the works covered under the Contract including construction power water supply etc. He shall submit a list of all such materials to the Employer before the commencement of work at site. These tools and tackle shall not be removed from the site without the written permission of the Employer.

4.1.13 MATERIALS HANDLING AND STORAGE

- 4.1.13.1 All the supplies under the Contract as well as Employer supplied items (if any) arriving at site shall be promptly received, unloaded and transported and stored in the stores by the Contractor.
- 4.1.13.2 Contractor shall be responsible for examining all the shipment and notify the Employer immediately of any damage, shortage, discrepancy etc. for the purpose of Employer's information only. The Contractor shall submit to the Employer every week a report detailing all the receipts during the week. However, the Contractor shall be solely responsible for any shortages or damages in transit, handling and/or in storage and erection at site. Any demurrage, and other such charges claimed by the transporters, railways etc., shall be to the account of the Contractor.
- 4.1.13.3 The Contractor shall maintain an accurate and exhaustive record-detailing out the list of all items received by him for the purpose of erection and keep such record open for the inspection of the Employer.
- 4.1.13.4 All items shall be handled very carefully to prevent any damage or loss. The materials stored shall be properly protected to prevent damage. The materials from the store shall be moved to the actual location at the appropriate time to avoid damage of such materials at Site.
- 4.1.13.5 All the materials stored in the open or dusty location must be covered with suitable weatherproof and flameproof covering material wherever applicable.
- 4.1.13.6 The Contractor shall be responsible for making suitable indoor storage facilities, to store all items/materials, which require indoor storage.
- 4.1.13.7 The Contractor shall have total responsibility for all equipment and materials in his custody, stored, loose, semi-assembled and/or erected by him at site. The contractor shall make suitable security arrangements including employment of security personnel to ensure the protection of all materials, equipment and works from theft, fire, pilferage and any other damages and loss.
- 4.1.13.8 The Employer will verify the storage facilities arranged by the contractor and dispatch clearance will be provided only after Employer is satisfied.

4.1.14 CONTRACTOR'S MATERIALS BROUGHT ON TO SITE

- 4.1.14.1 The Contractor shall bring to Site all equipment, components, parts, materials, including construction equipment, tools and tackles for the purpose of the work under intimation to the Engineer. All such goods shall, from the time of their being brought vest in the Employer, but may be used for the purpose of the Works only and shall not on any account be removed or taken away by the Contractor without the written permission of the Engineer. The Contractor shall nevertheless be solely liable and responsible for any loss or destruction thereof and damage there to
- 4.1.14.2 The Employers shall have a lien on such goods for any sum or sums, which may at any time, be due or owing to him by the Contractor, under in respect of or by reasons of the Contract. After giving a fifteen (15) days' notice in writing of his intention to do so, the Employer shall be at liberty to sell and dispose of any such goods, in such manner, as he shall think fit including public auction or private treaty.
- 4.1.14.3 After the completion of the Works, the Contractor shall remove from the Site under the direction of the Engineer the materials such as construction equipment, erection tools and tackles, scaffolding etc. with the written permission of the Engineer. If the Contractor fails to remove such materials within fifteen (15) days of issue of a notice by the Engineer, the Engineer shall have the liberty to dispose of such materials as detailed under clause 1.24.2 above and credit the proceeds thereto to the account of the Contractor.

4.1.15 COMMISSIONING SPARES

4.1.15.1 It will be the responsibility of the Contractor to provide all commissioning spares required for initial operation till the Employer declares the equipment as ready for commissioning. All commissioning spares shall be deemed to be included in the scope of the Contract at no extra cost to the Employer.

4.1.15.2 These spares shall be received and stored by the Contractor at least 3 months prior to the schedule date of commencement of commissioning of the respective equipment and utilized as and when required. The unutilized spares and replaced parts, if any, at the end of successful completion of performance and guarantee test shall be the property of the Contractor and he will be allowed to take these parts back at his own cost with the permission of Employer's Representative.

4.1.16 Consignee Details

The Contractor shall supply the equipment and execute the works at 132/33KV Sipajhar GSS, AEGCL, Dist-Darrang, Assam

4.2.0 SPECIFICATION FOR DESIGN AND FABRICATION OF SUBSTATION STEEL STRUCTURES

4.2.1 SCOPE

4.2.1.1 This section covers the design parameters and specification for fabrication and galvanizing, of steel structures, bolts & nuts, tower accessories etc. for Substations covered under this Bid Document.

4.2.2 MATERIALS

4.2.2.1 Structural Steel

The structures shall be of structural steel conforming to any of the grade, as appropriate, of IS 2062 (latest edition) Steel conforming IS 8500 may also be used.

Medium and high strength structural steels with known properties conforming to any other national or international standards may also be used.

4.2.2.2 Bolts

Bolts used shall conform to IS12427 or bolts of property class 4.6 conforming to IS 6639 may also be used.

High strength bolts, if used (only with steel conforming to IS 8500) shall conform to property class 8.8 of IS 3757.

Foundation Bolts shall conform to IS 5624.

Step bolts shall conform to IS 10238

4.2.2.3 Nuts

Nuts shall conform to IS 1363 (Part 3). The mechanical properties shall conform to property class 4 or 5 as the case may be as specified in IS 1367 (Part 6) except that the proof stress for nuts of property class 5 shall be as given in IS 12427.

Nuts to be used with high strength bolts shall conform to IS 6623.

4.2.2.4 Washers

Washers shall conform to IS 2016. Heavy washers shall conform to IS 6610. Spring washers shall conform to type B of IS 3663

Washers to be used with high strength bolts and nuts shall conform to IS 6649.

4.2.2.5 Galvanization

Structural members, plain and heavy washers shall be galvanized in accordance with the provisions of IS 4759.

Spring washers shall be hot dip galvanized as per service grade 4 of IS 4759 or IS 1537.

4.2.2.6 Other Materials

Other materials used in the construction of the supporting structures shall conform to appropriate Indian Standards wherever available.

4.2.3 DESIGN PARAMETERS

4.2.3.1 Switchyard structures such as columns, beams and equipment mounting structures shall be designed as per actual site requirement. The drawings are to be submitted for approval prior to supply/execution.

Note: Structures with earth peak shall assume to have four earth wires for design purpose in normal condition.

4.2.3.2 Spans

Following Spans shall be considered in design of all structures as applicable: -

a). Line gantries (structures to terminate lines):

(i) For 33 KV Switchyard: 50 Meter, wind & weight span.

b). All other Structures

(i) For 33 KV Switchyard: 20 Meter, wind & weight span.

4.2.4 Deviation Angle

The design of line gantries shall only be checked for a maximum deviation angle of 300 from normal at center of gantries to Dead End Tower.

4.2.5 Conductors and Shield Wires

a) The Conductor shall conform to IS: 398 (latest edition) except where otherwise specified herein.

The details of the ACSR Moose, ACSR Zebra and ACSR Panther conductors are tabulated below:

	DESCRIPTION	ACSR 'MOOSE'	ACSR 'ZEBRA'	ACSR 'PANTHER'
1	Code name	MOOSE	ZEBRA	PANTHER
2	Number of strands & size	Al: 54/ 3.53 mm	Al: 54/ 3.18 mm	Al: 30/ 3.00 mm
		St: 7/ 3.53 mm	St: 7/ 3.18 mm	St: 7/ 3.00 mm
3	Overall diameter	35.05 MM	28.62 mm	21.00 mm
4	Breaking load	136.38 KN	130.32 kN	130.32 kN
5	Weight of conductor	2004 Kg/KM	1621 kg / km	974 kg / km
6	Co-efficient Of Linear Expansion	23x10-6 /0C	19.35x10-6 /0C	19.35x10-6 /0C
7	Number of strands			
	Steel center	1	1	1
	1st Steel Layer	6	6	6
	1st Aluminum Layer	12	12	12
	2nd Aluminum Layer	18	18	18
	3rd Aluminum Layer	24	24	-
8	Sectional area of Aluminum	528.50 mm ²	428.90 mm ²	212.10 mm ²
9	Total sectional area	597.00 mm ²	484.50 mm ²	261.50 mm ²
10	Calculated d.c. resistance at 20 C	0.05552 ohm/km	0.06869 ohm/km	0.1400 ohm/km
11	Ultimate tensile strength	161.2 kN	130.32 kN	89.67

b) For protection against direct lightning G.I. wires of size 7/3.66 mm conforming to IS 2241 shall be considered for all switch yards.

4.2.6 DESIGN DRAWINGS

4.2.6.1 The relevant drawings for all the towers, beams and equipment mounting structures shall be furnished by the Supplier to the Purchaser which shall include structural/fabrication drawings, Bill of Materials including nuts and bolts.

4.2.6.2 The structural drawings, Bill of materials and shop fabrication drawings for all the structures shall be submitted in four copies and will be finally approved by the Purchaser.

The fabrication shall be taken up from the approved shop drawings.

The overall responsibility of fabricating structure members correctly lies with the Supplier only and the Supplier shall ensure that all the members can be fitted while erecting without any undue strain on them.

4.2.7 ACCESSORIES

4.2.7.1 Step Bolts

Each column/tower shall be provided with step bolts conforming to IS: 10238 of not less than 16mm diameter and 175mm long spaced not more than 450mm apart and extending from 2.5 meters above the ground level to the top. Each step bolt shall be provided with two nuts on one end to fasten the bolt securely to the tower and button head at the other end to prevent the feet from slipping away. The step bolts shall be capable of withstanding a vertical load not less than 1.5 KN.

4.2.7.2 Insulator Strings and Conductor Clamps Attachments

a) Single suspension and tension insulator string assemblies shall be used for stringing busbars for the attachment of Suspension Insulator string, a suitable strain plate of sufficient thickness for transferring the load to the tower body shall be provided. To achieve requisite clearances, if the design calls for providing extra D-shackles, link plate etc. before connecting the insulator string the same shall be supplied by the Supplier.

b) At tension points strain plates of suitable dimensions placed on the beams, shall be provided for taking the hooks or D-shackles of the tension insulator strings. To achieve requisite clearances, if the design calls for providing extra D-shackles, link plate etc. before connecting the insulator string the same shall be supplied by the Supplier.

4.2.7.3 Earth wire Clamps Attachment

i. Suspension Clamp

The detailed drawing shall be submitted by the Supplier for Purchaser's approval. The Supplier shall also supply U-bolts, D-shackles wherever required.

a) Tension Clamps

Earth-wire peaks of tension towers shall be provided with suitable plates to accommodate the shackle of tension clamps. The Supplier shall also supply the U-bolts wherever required and take Purchaser's approval for details of the attachments before the mass fabrication.

4.2.8 FABRICATION

4.2.8.1 The fabrication of substation steel structures shall be in conformity with the following:

a. Except where hereinafter modified, details of fabrication shall conform to IS: 802 (Part-II) or the relevant international standards.

b. The tower structures shall be accurately fabricated to connect together easily at site without any undue strain on the bolts.

c. No angle member shall have the two leg flanges brought together by closing the angle.

d. The diameter of the hole shall be equal to the diameter of bolt plus 1.5mm.

e. The structure shall be designed so that all parts shall be accessible for inspection and cleaning. Drain holes shall be provided at all points where pockets of depression are likely to hold water.

f. All identical parts shall be made strictly inter-changeable. All steel sections before any work are done on them shall be carefully levelled, straightened and made true to detailed drawings by methods which will not injure the materials so that when assembled, the adjacent matching surfaces are in close contact throughout. No rough edges shall be permitted in the entire structure.

- g. Minimum Thickness of Tower Members shall be as follows: -

ITEM	Minimum thickness (in mm)
Leg members & main chords of beams in compression	5
Other members	4

4.2.9 Drilling and Punching

4.2.9.1 Before any cutting work is started, all steel sections shall be carefully strengthened and trued by pressure and not by hammering. They shall again be trued after being punched and drilled.

4.2.9.2 Holes for bolts shall be drilled or punched with a jig but drilled holes shall be preferred. The punching may be adopted for thickness up to 16mm. Tolerances regarding punch holes are as follows:

- a) Holes must be perfectly circular and no tolerances in this respect are permissible.
- b) The maximum allowable difference in diameter of the holes on the two sides of plates or angle is 0.8mm. I.e. the allowable taper in a punched holes should not exceed 0.8 mm on diameter.
- c) Holes must be square with the plates or angles and have their walls parallel.

4.2.9.3 All burrs left by drills or punch shall be removed completely. When the tower members are in position the holes shall be truly opposite to each other. Drilling or reaming to enlarge holes shall not be permitted.

4.2.10 Erection mark

4.2.10.1 Each individual member shall have erection mark conforming to the component number given to it in the fabrication drawings. The mark shall be marked with marking dies of 16mm size before galvanizing and shall be legible after galvanizing.

4.2.11 GALVANIZING AND PAINTING

4.2.11.1 Galvanizing of the various members of the structures shall be done only after all works of sawing, shearing, drilling, filling, bending and matching are completed. Galvanizing shall be done by the hot dip process as recommended in IIS: 2629 or other such authoritative international standards and shall produce a smooth, clean and uniform coating of not less than 610 gm per square meter. The preparation for galvanizing and the galvanizing process itself must not affect adversely the mechanical properties of the treated materials. No manual Galvanization process will be accepted.

4.2.11.2 All assembly bolts shall be thoroughly hot dip galvanized after threading. Threads shall be of a depth sufficient to allow for the galvanized coating, which must not be excessive at the root of the threads, so that the nut shall turn easily on the completed bolts without excessive looseness. The nut threads shall not be galvanized, but oiled only.

4.2.11.3 The outside surface shall be galvanized. Sample of galvanized materials shall be supplied to the galvanized test set out in IIS 729 or other such authorities international standards.

4.2.12 EARTHING

4.2.12.1 To keep provision in the structures for earthing, holes shall be drilled on two diagonals opposite legs of the towers/columns/mounting structures. The holes shall be suitable for bolting 65 mm X 12 mm GI strips and

shall be such that the lower hole is about 350 mm above the ground level, clear of the concrete muffing, for connecting the earthing strip.

4.2.13 TEST AND TEST CERTIFICATE

4.2.13.1 Each consignment ready for transportation shall be offered to ASEB for inspection before dispatch giving a minimum time of not less than 30 days. Samples of fabricated structure materials shall be subjected to following tests: -

- a) Steel: The structural steel shall conform to IS 226 and IS 8500, BS 4360-1068 or ISO / R 630 other such authoritative international standards. Manufacturer's test certificate shall be submitted for all used steel.
- b) Galvanizing: The galvanizing shall be as per IS 2633 or BS 729 other such authoritative international standards. Zinc coating over the galvanized surfaces shall not be less than 610 gm per square meter.
- c) Bolts and nuts: Manufacturer's test certificate as per standard practice shall be submitted.

4.2.14 TEST AT SUPPLIER'S PREMISES

4.2.14.1 The Supplier shall fabricate one specimen structure of each type as soon as possible after placement of order and before starting the bulk fabrication of the structures ordered. It shall be assembled on a foundation as nearly similar as practicable to site and tested with suitable test loads as per specified broken wire condition, multiplied by the corresponding factor of safety to ensure that the design and fabrication complies with the requirements. Each structure shall be capable of withstanding the above-mentioned tests without any injury or any permanent deflection at any part. If any member is found to be weak or damaged the design should be suitably modified and the tower re-tested.

4.2.14.2 After the first lot of the structures manufactured, the members forming one structure of each type shall be selected at random from the lots of similar members and assembled in exactly the same manner as to be done at site. The structure then shall be set on foundation as nearly similar as practicable to site and tested with equivalent test load for which the structure has been designed.

4.2.14.3 No structure or any member thereof, which failed the test shall be supplied.

VACUUM CIRCUIT BREAKERS

SPECIFICATION OF 36 KV OUTDOOR TYPE PORCELAIN CLAD VACUUM CIRCUIT BREAKERS (PCVCB)

4.3 GENERAL TECHNICAL REQUIREMENTS

4.3.1 INTRODUCTION

The circuit breakers should be complete in all respects with insulators, bimetallic connectors, interrupting chamber, operating mechanism control cabinet, interlocks, auxiliary switches indicating devices, supporting structures, accessories, etc., described herein and briefly listed in the schedule of requirements. The scope of supply shall also include necessary special tools and plants required for erection as indicated, if any.

4.3.2 STANDARDS

The circuit breaker shall conform in all respects to the requirements of latest issue of IS/IEC specifications except for modifications specified herein. The equipment manufactured according to any other authoritative standards which ensure an equal or better quality than the provision of IS/IEC specifications shall also be acceptable. The salient point of difference between the proposed standard and provision of these specification shall be clearly brought out in the tender. A copy of English version of such specifications shall be enclosed with the tender.

The list of standards mentioned in this specification and to which the circuit conform is given below:

1.	IEC-62271-100	High Voltage A.C. Circuit Breakers
2.	IEC-60137	Bushing for alternating Voltages above 1000 volts
3.	IEC-60071	Insulation Co-ordination
4.	IEC-60694	Common clauses for high voltages switchgear and control gear standards
5.	IEC-60815	Specification for Creepage distances
6.	IS-13118	Specifications for high voltage alternating current circuit breakers
7.	IS-2099	High voltages porcelain bushings
8.	IS-4379	Identification of the contents of industrial gas cylinders
9.	IS-3072	Installation and maintenance of switchgear
10.	IEC-60267	Guide for testing of circuit breakers with respect to out of phase switching
11.	IS-802	Code of practice for use of structural steel in overhead transmission lines
12.	IEC-17A Study Group Dec.198 1	Sealing of interrupters / breakers
13.	IS-1554	PVC insulated cables up to and including 1000 volts
14.	IS-5	Colours for ready mixed paints and channels
15.	Ref.Standard IES	Internal Electro-Technical Commission Bureau Central Data Commission, Electro Technique International, 1, Ruede Verembe, Geneva, Switzerland

16.	IS	Indian Standard Bureau of India Standard, Manak Bhawan 9, Bahadurshah Zafar Marg, New Delhi – 110 002, India
-----	----	-----------------------------------------------------------------------------------------------------------------

4.3.3 SERVICE CONDITONS

CLIMATIC CONDITONS

The breakers and accessories to be supplied against this specification shall be suitable for satisfactory continuous operation as per section-I.

AUXILIARY POWER SUPPLY

Auxiliary electrical equipment shall be suitable for operation on the following supply system.

- | | | | |
|----|---------------------------------------------|---|----------------------------------------------------------------------------------------------------------------------------------------|
| a) | Power Devices (like motors) | : | 415 V, 3 phase 4 wire 50 hz, neutral grounded
AC supply |
| b) | DC Alarm, Control and
Protective Devices | : | 220/110 V/30 V DC, ungrounded 2 wire
(Substation wise exact details shall be
furnished by the successful bidder after
survey) |
| c) | Lighting | : | 240 V, single phase 50 Hz AC supply |

Bidder's scope includes supply of interconnecting cables, terminal boxes, etc. The above supply voltage may vary as indicated below and all devices shall be suitable for continuous operation over the entire range of voltages

- | | | |
|-----|-----------|--------------------|
| i) | AC Supply | Voltage + 10% -15% |
| | | Frequency \pm 5% |
| ii) | DC Supply | -15% to + 10% |

4.3.4 GENERAL REQUIREMENT OF 36 KV/OUTDOOR VACUUM CIRCUIT BREAKERS

The vacuum type circuit breaker shall have vacuum interrupters, designed to provide a long contact life at all currents upto rated making and breaking current during switching operation. The vacuum interrupters sealed for life shall be encapsulated by porcelain insulators for outdoor installation requirement of the circuit breakers. The offered breakers shall be suitable for outdoor operation under climatic conditions specified without any protection from sun, rain and dust storm.

The vacuum interrupters of each phase shall be housed in a separate porcelain insulator. The three identical poles shall be mounted on a common base frame and the contact system of three poles should be mechanically linked to provide three pole gang opening/closing for all type of faults.

- i) The offered equipment shall be practically maintenance free over a long period.
- ii) All mechanical parts and linkages shall be robust in construction and maintenance free, over at least 10,000 switching operations, except for lubrication of pins/articulated joints at interval of 5 years or 5000 operations.

- iii) Similar parts shall be strictly interchangeable without special adjustment of individual fittings. Parts requiring maintenance shall be easily accessible, without requiring extensive dismantling of adjacent parts.
- iv) The operating mechanism will be self-maintained and of proper operation endurance not less than the mechanical life of circuit breaking unit. It shall be spring operated type described hereinafter.
- v) The circuit breaker shall be supplied complete with all auxiliary equipment, meant necessary for the safe operation, routine and periodic maintenance. All internal wiring including those of spare auxiliary contacts shall be complete and wired up to terminal blocks.
- vi) The breaker shall be totally re-strike free under all duty conditions. The details of any device incorporated to limit or control the rate of rise of re-striking voltage across the circuit breaker contacts shall be stated.
- vii) The breaker shall be reasonably quiet in operation and the noise level shall not exceed 140 decibels.
- viii) The breaker shall be suitable for three phase re-closing operation.
- ix) An operation counter, visible from the ground level even with the mechanism housing closed shall be provided.

4.3.5 FIXED AND MOVING CONTACT

The fixed and moving contacts of the breaker have to ensure permanent full contact during closing. All making and breaking contacts shall be hermetically sealed and free from atmospheric effects.

The main contacts should have low contact resistance.

4.3.6 RECOVERY VOLTAGE AND POWER FACTOR

The circuit breaker shall be capable of interrupting rated power with recovery voltage equal to the rated maximum line to line service voltage at rated frequency and at a power factor equal to or exceeding 0.15. In case of multiple break circuit breaker, devices/method adopted for ensuring uniform voltage distribution across all the breaks shall be indicated and actual voltage distribution recorded during interruption tests shall be furnished with the bid.

4.3.7 RESTRIKING RECOVERY

The complete data for the phase factor, amplitude factor, etc., for rate of rise of re-striking voltage shall be furnished in the tender.

4.3.8 LINE CHARGING INTERRUPTING CAPACITY

The circuit breaker shall be designed so as to be capable of interrupting line charging currents without undue rise in the voltage on the supply side without re-strike and without showing sign of undue strains.

The maximum permissible switching over voltage shall not exceed 2.5 p.u. The guaranteed over voltage, which will not be exceeded while interrupting the rated line charging current for which the breaker is designed to interrupt shall also be stated. The results of the tests conducted along with the copies of the oscillographs to prove ability of the breakers to interrupt the rated as well as lower values of the line charging current shall be furnished with the tender.

4.3.9 TRANSFORMER CHARGING CURRENT BREAKING CAPACITY

The breaker shall be capable of interrupting inductive currents, such as those occurring while switching off unloaded transformers, without giving rise to undue over voltage and without re-strikes. The maximum over voltage value, which will not be exceeded under such conditions shall be stated in the tender.

4.3.10 BREAKING CAPACITY FOR SHORTLINE FAULTS

The interrupting capacity of the breaker for short line faults shall be stated in the tender. The details of the test conducted for proving the capability of the breaker under a short line fault occurring from one phase to earth conditions shall also be stated in the tender. The rated characteristics for short line faults shall be in accordance with stipulation contained in clause 4.105 of IEC 62271-100.

4.3.11 AUTOMATIC RAPID RECLOSING

36 kV circuit breaker shall be suitable for 3 pole rapid re-closing.

4.3.12 OUT OF PHASE SWITCHING

The circuit breaker shall be capable of satisfactory operation even under conditions of phase opposition that may arise due to faulty synchronization. The maximum power that the breaker can satisfactorily interrupt under "Phase Opposition" shall be stated in the bid".

4.3.13 TEMPERATURE RISE

The maximum temperature attained by any part of the equipment when in service at side and under continuous full load conditions and exposed to the direct rays of the sun shall not exceed the permissible limits fixed by IEC. When the standards specify the limits of temperature rise these shall not be exceeded when corrected for the difference between ambient temperature specified in the approved specification.

The limits of temperature rise shall also be corrected for altitude as per IEC and stated in the bid.

4.3.14 INSULATORS SUPPORTS AND HOUSING

The porcelain used shall be homogenous, free from cavities and other flaws. The insulators shall be designed to have ample insulation, mechanical strength and rigidity for satisfactory operation under conditions specified above. The puncture strength of bushing shall be greater than the flash over value. The design of bushing shall be such that the complete bushing in a self-contained unit and no audible discharge shall be detected at a voltage up to a working voltage (Phase Voltage) plus 10%. The support insulator shall conform to IEC-60137. Minimum clearance between phases, between live parts and grounded objects shall be as per IS-3072-1975 and should conform to Indian Electricity Rules-1956. The minimum creepage distance for severely polluted atmosphere shall be 25 mm/KV as per IEC-815-1985.

The details for atmospheric pollution of various sub-stations where these breakers are to be installed shall be as per Clause 1.3.1 of this specification. The air clearance of bushing should be such that if the bushings were tested at an altitude of less than 1000 meters, air clearance would withstand the application of higher voltages (IS-2099-1973 para 6.1). In order to avoid breakdown at extremely low pressures the support insulators should not be covered by moisture and conducting dust. Insulators should therefore be extremely clean and should have antitracking properties. Sharp contours in conducting parts should be avoided for

breakdown of insulation. The insulators shall be capable to withstand the seismic acceleration of 0.3 g in horizontal direction.

4.3.15 OPERATING MECHANISM GENERAL REQUIREMENTS

The operating mechanism shall be stored energy type and capable of giving specified duty of the breaker (sequence of opening and closing) as specified under O-0.3 sec-CO-3 min-CO. The breaker shall also pass the operational test which ascertains the capabilities of operating mechanism. The operating mechanism shall be capable to perform the following functions efficiently.

- i) To provide means where the circuit breaker can be closed rapidly, at all currents from zero to rated making current capacity.
- ii) To hold the circuit breaker in closed position by toggles or latches till the tripping signal is received.
- iii) To allow the circuit breaker to open without delay immediately on receiving tripping signal.
- iv) To perform auto re-closure duty cycle.
- v) To perform the related functions such as indication, contacts, etc.

Operating mechanism should also be suitable for three phase auto re-close duty. The closing spring shall be automatically charged by motor immediately after closing operation. In case of failure of supply to the spring charging motor, the spring shall be chargeable by hand-crank.

a) TRIPPING/CLOSING COILS

The circuit breakers shall be provided with two trip coils and one closing coil per breaker. First trip coil shall be utilized for tripping the breaker on main protection fault detection. Whereas second trip coil shall be used to trip the breaker when first trip coil fails to trip the breaker and backup protection comes into operation and shall also be used to trip the breaker on command. Provision shall be given for trip circuit supervision both in pre close and post close condition of the breaker. All the breakers shall have provision for independent electrical operation of trip coils from local as well as remote through local/remote selector switch.

b) TRIP FREE FEATURES

When the breaker has been instructed to close by manual instructions using push button, the operating mechanism will start operating for closing operations. If in the meantime a fault has taken place, the relay provision shall be such that it should close the trip circuit simultaneously interrupting the live circuit of closing coil which has been instructed for close command.

The trip free mechanism shall permit the circuit breaker to be tripped by the protective relay even if it is under the process of closing. An anti-pumping device to prevent the circuit breaker from reclosing after an automatic opening shall be provided to avoid the breaker from pumping i.e., anti-pumping relay should interrupt the closing coil circuit.

c) Controls

The circuit breaker shall be controlled by a control switch located in the control cabinet. The control arrangement shall be such as to disconnect the remote-control circuits of the breaker, when it is under test. Local control devices, selector switch and position indicator shall be located in weather and vermin-proof

cabinet with degree of protection not less than IP-55. The circuit breaker control scheme shall incorporate trip circuit supervision arrangement. Local/remote selector switch shall be provided for all breakers for selection of “Local” control/remote control.

Provision shall be made for local manual, electrical and spring controls. Necessary equipment's for local controls shall be housed in the circuit breaker cabinet of weather-proof construction. In addition to this, a hand closing device for facilitating maintenance shall also be provided.

Each circuit breaker shall have a mechanical open/closed and spring charge indicator in addition to facilities for provisions for semaphore indicators for breakers which are required for the mimic diagram in the control room. Lamps for indicating, 'close/open' position of the breaker shall also be provided.

The contact pressure spring and tripping spring shall be chargeable during closing operation to ensure the breaker is ready to open. Mechanically ON/OFF indicator, spring charged indicator and operation counter shall be provided on the front of the control cubicle. For tripping, the spring provided shall ensure the tripping

Mechanical indicator, to show the 'open' and 'close' position of the breaker shall be provided in a position where it will be visible to a man standing on ground with mechanism housing open. An operation counter, visible from the ground even with the mechanism housing closed, shall be provided. Electrical tripping of the breaker shall be performed by shunt trip coils.

Closing coil shall operate correctly at all value of voltage between 85% and 110% of the rated voltage. Shunt trip coils shall operate correctly under all operating conditions of the circuit breaker up to the rated breaking capacity and at all values of supply voltage between 85% and 110% of rated voltage. The variation in A.C. supply voltage shall be -15% to $+10\%$ while variation in frequency shall be ± 3 . Working parts of the mechanism shall be non-corrosive material. Bearings which require grease shall be equipped with pressure type fillings.

Bearing pins, bolts, nuts and other parts shall be adequately pinned or locked to prevent loosening or changing adjustment with repeated operation of the circuit breaker. It shall be possible to trip the circuit breaker even in the event of failure of power supply.

Operating mechanism and all accessories shall be enclosed in control cabinet. A common marshalling box for the three poles of the breaker shall be provided, along with supply of tubing, cables from individual pole operating boxes to the common marshalling box, local.

4.3.16 SPRING OPERATED MECHANISM

The motor compressed spring mechanism shall consist of a closing spring which is wound or compressed by an electric motor immediately after the breaker closes.

After the breaker has tripped, the tripping spring shall remain in the released position as long as the breaker is open, but the closing spring shall remain wound and ready for closing operation. The operating mechanism shall have all the necessary auxiliaries, apparatus for operation and supervision, like motor starter with thermal overload release, one closing coil, two trip coils, push button for local electrical operation, local/remote control selector switch, push button for direct mechanical tripping, auxiliary switches,

anti-pumping contactors, operation counter, socket for inspection, lamp and heater with switch. Spring charging motor shall be standard single phase universal motor suitable for 220 volts supply.

- i) Operating voltages for closing/tripping coils shall be 220/110/48/24 Volts DC **or as per actual DC voltage available at existing substations which is to be verified by supplier after award of contract.**
- ii) Operating voltages for heater elements shall be 220V AC 50 HZ. Other features of the spring-operated mechanism shall be as follows.
 - a) The spring operating mechanism shall have adequate energy stored in the operating to close and latch the circuit breaker against the rated making current and also to provide the required energy for tripping mechanism in case the tripping energy is derived from the operating mechanism.
 - b) The mechanism shall be capable of performing the rated operating duty cycle of O-0.3Sec-CO-3 Min-CO...
 - c) The spring charging motor shall be AC or DC operated and shall not take more than 30 sec., to fully charge the closing spring made for automatic charging. Charging of spring by the motor should not interfere with the operation of the breakers.
 - d) The motor shall be adequately rated to carry out a minimum of one duty cycle. Also, provision shall be made to protect the motor against overloads.
 - e) In case of failure of power supply to spring charging motor, the mechanism shall be capable of performing one open-close-open operation.
 - f) Mechanical interlocks shall be provided in the operating mechanism to prevent discharging of the closing springs when the breaker is already in closed position. Provision shall be made to prevent a closing operation to be carried out with the spring partially charged.
 - g) Facility shall be provided for manual charging of closing springs.

4.3.17 CONTROL CABINET

The switchgear operating mechanism, the control equipment such switch for closing and tripping the breakers, various control relays, anti-pumping device, a set of terminal blocks for wiring connections, MCB's for disconnecting the control auxiliary power supplies including relays, etc., shall be enclosed in a cabinet to be mounted on a suitable structure at a convenient working height at the end of the breaker in the outdoor switchyard. The supporting structure and the enclosure shall be capable of withstanding the typical tropical climatic conditions, change of ambient temperature, severe dust-storms, very high relative humidity those are prevailing at the site of location of switchgear.

i) ENCLOSURE

The enclosure shall be made out of stretched level steel plates not less than 3 mm thick and of light section structural steel. It should be weather proof as well as vermin proof.

The enclosure shall provide protection against dust and foreign objects. Each cabinet section shall have full width and full-length hinged doors mounted on the front that swing fully open. The doors shall be provided with latches to securely hold it with the cabinet. Doors shall be of sturdy construction, with resilient material covering, fully perimetrically contacting the cabinet frame to provide dust protection and prevent metal to metal contact except at the latch points. Filtered ventilation shall be provided along with the rigid supports for control and other equipment, measuring instruments, mounting cabinet members and equipment shall

not restrict easy access to terminal blocks for terminating and testing external connection or to equipment for maintenance.

All screws and bolts used for assembling and mounting wire and cable termination, supports, devices and other equipment shall be provided with lock washers or other locking devices. All metal parts shall be clean and free of weld splatter, rust and mill scale prior to application of double coat of zinc chromate primer which should be followed by an under coat to serve as base and binder for the finishing coat. The shade of exterior and interior shall be as per GTR. The mounting structure shall be galvanized and shall be as per IS-802-II-1978.

ii) HEATERS

Suitable heaters shall be mounted in the cabinet to prevent condensation. Heaters shall be controlled by thermostat and shall be provided with ON/OFF switches and fuses. Heaters shall be suitable for 240 V AC supply voltage.

iii) LIGHTING

At least one 13-watt CFL fixture and lamp working on 240 V 50 c/s AC supply shall be provided in each switchgear control cubicle section and shall be located suitably to provide adequate interior lighting of the cubicle. A single-pole 6 Amp. lighting switch shall be provided for each cubicle along with 5/15 amp.

The lighting and convenient outlet circuits shall be completely wired in conduit and terminated on cubicle terminal blocks.

iv) WIRING AND CABLING

- a) Unless otherwise specified control wire shall be stranded tinned copper switchboard wire with 1.1 kV PVC insulation conforming to the requirements of IS-1554.
- b) All the control circuit and secondary wiring shall be wired completely and brought out to terminal block ready for external connections in the control cabinet. The cross-section of control wire shall not be less than 2.5 mm² copper (14 SWG).
- c) All spare auxiliary contacts of the circuit breaker shall be supplied wired up to terminal block. Each terminal in terminal block shall be suitable for at least 2 x 2.5 mm² copper conductor.
- d) All wiring termination on terminal blocks shall be made through lugs.
- e) All wires shall be identified with non-metallic sleeve or tube type markers at each termination.
- f) Terminal blocks shall be made up of moulded non-inflammable plastic material with blocks and barriers moulded integrally have white marking strips for circuit identification and moulded plastic covers. Disconnecting type terminal blocks will be provided.

v) GROUNDING

A ground bus of copper bar not less than 6 mm by 25 mm shall be provided for grounding the cabinet.

4.3.18 ACCESSORIES

Each circuit breaker assembly shall be supplied with the following accessories.

- i) Line and earthing terminals and terminal connectors.
- ii) Control housing with:
 - a) One auxiliary switch with adequate number of auxiliary contacts, but not less than 20 nos. (10 NO + 10 NC) for each breaker. These shall be over and above the No. of contacts used for closing, tripping and re-closing and interlocking circuit of the circuit breaker. All auxiliary contacts shall be capable of use as “Normally closed” or “Normally open” contacts. Special auxiliary contacts required for the re-closing circuit if any, shall also be provided. There shall be provision, to add more auxiliary contacts at a later date, if required.
 - b) Operation counter
 - c) Position indicator (Close/Open)
 - d) Necessary cable glands
 - e) Fuses
 - f) Manual trip device and local test push buttons
 - g) Terminal blocks and wiring for all control equipment and
 - h) Adequate number of heaters for continuous operation to prevent moisture condensation in the housing of operating mechanism
 - i) Selector switch for local/remote control.

4.3.19 SUPPORTING STRUCTURE

The circuit breakers shall be supplied complete with necessary galvanized steel supporting structures, foundation and fixing bolts, etc., the galvanizing shall be as per IS. The mounting of the breaker shall be such as to ensure the safety of the operating staff and should conform to Indian Electricity Rules, 1956. Minimum ground clearance of live part from ground level shall be 3700 mm from finished ground level.

The bidder shall submit detailed design calculations and detailed design calculations and detailed drawings in respect of supporting structures suitable for the equipment offered.

All material for making connections between the circuit breaker and its control shall also be included in the scope of supply. Facility to earth the circuit breaker structure at two points shall be provided.

4.3.20 SURFACE FINISH

All interiors and exteriors of tanks, control cubicles and other metal parts shall be thoroughly cleaned to remove all rust, scales, corrosion, greases or other adhering foreign matter. All steel surfaces in contact with insulation oil, as far as accessible, shall be painted with not less than two coats of heat resistant, oil insoluble, insulating paint.

All metal surfaces exposed to atmosphere shall be given two primer coats of zinc chromate and two coats of epoxy paint with epoxy base thinner. All metal parts not accessible for painting shall be made of corrosion resisting material. All machine finished or bright surfaces shall be coated with a suitable preventive compound and suitably wrapped otherwise protected. All paints shall be carefully selected to withstand tropical heat and extremes of weather within the limits specified. The paint shall not scale off or wrinkle or be removed by abrasion due to normal handling.

All ferrous hardware, exposed to atmosphere, shall be hot dip galvanized.

4.3.21 GALVANISING

All ferrous parts including all sizes of nuts, bolts, plain and spring washers, support channels, structures, shall be hot dip galvanized conforming to latest version of IS:2629 or any other equivalent authoritative standard.

4.3.22 CABLE TERMINATION

Suitable cable glands for terminating the multicore cable, shall be provided wherever required.

4.3.23 TERMINAL CONNECTIONS AND EARTH TERMINALS

Each circuit breaker connected with incoming and outgoing feeders shall be provided with solderless clamp type connectors suitable for ACSR conductor.

Each circuit breaker pole and control cabinet shall be provided with appropriate number of grounding terminals and clamps for receiving ground connections.

Each circuit breaker pole and control cabinet shall be provided with appropriate number of grounding terminals and clamps for receiving ground connections.

4.3.24 INTERLOCKS

Necessary interlocks to prevent closing or opening of the breaker under low pressure of the contact spring and devices for initiating alarm shall be provided. The detailed interlocking scheme based upon single line diagram as applicable for the substation shall be provided by the contractor

Requirement of interlock shall be as given below:

- i) Isolator should not be operated unless the associated breaker is in open position.
- ii) The circuit breaker shall close only after all isolators associated with it have been in closed position.

In case of double bus bar arrangement following additional requirement for interlocking shall be provided.

- i) One bus bar selector isolator of any bay excepting the bus coupler bay shall close only when,
 - a) The circuit breaker of corresponding bay is open and locked.
 - b) The other bus isolator of that bay is open.
- ii) When one bus isolator of any bay excepting the bus coupler bay is closed. The other shall close only when the bus coupler circuit breaker and both the bus isolators are closed.
- iii) Bus isolator of bus coupler bay shall operate only when the bus coupler breaker is open.
- iv) The bypass isolator of feeder shall close when the feeder circuit breaker and its adjoining isolators are closed.

4.3.25 EARTHING SYSTEM

All switchgear enclosures should be bolted metal to metal and should carry the full earth return current. Connection between phases at the earthing points shall be dimensioned for carrying full earth return current i.e., actual service current not rated current.

4.3.26 VACUUM INTERRUPTER ASSEMBLY

Each pole of the circuit breaker shall be provided with vacuum interrupter, one for each phase, hermetically sealed for life and encapsulated by ceramic insulators. The interrupter shall be provided with steel chromium arc chamber to prevent vaporized contact material being deposited on the insulating body. A further shield giving protection to the metal bellows shall also follow the travel of the moving contacts to seal the interrupter against the surroundings atmosphere.

It shall have high and consistent dielectric strength of vacuum unaffected by environment and switching operations. Bronzed joints should ensure retention of vacuum for life time. It shall have low and stable contact resistance due to absence of oxidation effects and shall ensure low power loss. The arcing voltage shall be low and minimum contact erosion.

4.3.27 GUARANTEED TECHNICAL PARTICULARS

Guaranteed and technical particulars as called for in Section-II shall be furnished along with the tender. Particulars which are subject to guarantee shall be clearly marked.

4.3.28 TESTS

TYPE TESTS

Each circuit breaker shall comply with requirements of type tests prescribed in IEC publication No. 62271-100

- i) Short time and peak withstand current test.
- ii) Short circuit breaking capacity and making capacity.
- iii) Capacitive current switching test: Cable charging current breaking test (U_r less than or equal to 52 kV).
- iv) Dielectric test i.e., power frequency withstand and impulse withstand test
- v) Temperature rise test.
- vi) Mechanical Endurance Test at ambient temperature.
- vii) Measurement of resistance of the main circuit.

ROUTINE TESTS

Routine Tests as per IEC- 62271-100 shall be carried out on each breaker in presence of purchaser's representative at the manufacturer's expenses at his works except, where agreed to otherwise. All test reports should be submitted and should be got approved from the purchaser before despatch of the equipment.

SITE TESTS ON CONTROL AND AUXILIARY CIRCUIT

The following tests shall be conducted at site.

- i) Voltage tests on control and auxiliary circuit.
- ii) Measurements of resistance of the main circuit.
- iii) Mechanical Operation Tests.

4.3.29 NAME PLATE

Equipment should be provided with name plate giving full details of manufacture, capacities and other details as specified in the relevant ISS or other specification stipulated.

4.3.30 TECHNICAL PARAMETERS

36 KV CIRCUIT BREAKERS

S. NO.	DESCRIPTION		VALUES
i)	Rate voltage (KV rms)	:	36 KV
ii)	Rated frequency (Hz)	:	50
iii)	System neutral earthing	:	Solidly grounded system
iv)	Type of arc quenching medium	:	Vacuum
v)	Rated normal current at site conditions (Amps)	:	1250 Amps
vi)	Number of poles	:	3
vii)	Installation	:	Outdoor type
viii)	Temperature rise	:	As per IEC 56 (Table-4) Page-19
ix)	Rated short circuit	:	
	a) Interrupting capacity at 36 KV	:	31.5 KA
	b) The percentage DC components	:	As per IEC-62271-100
	c) Duration of short circuit	:	3 Sec.
x)	Rated short circuit making	:	82 KA
xi)	First pole to clear factor	:	1.5
xii)	Rated short time current	:	26.3 KA
xiii)	Rated duration of short circuit	:	3 Seconds
xiv)	Total break time for any current up to the rated breaking current with limiting condition of operating and quenching media pressure (ms)	:	< 80 ms
xv)	Closing time (ms)	:	< 150 ms
xvi)	Mounting	:	Hot dip galvanized lattices steel support structured bolted type
xvii)	Phase to phase spacing in the switch yard i.e, interpole spacing for breaker (min) in mm	:	470±10
xviii)	Required ground clearance from the lowest line terminal if both the terminals are not in same horizontal plane (mm)	:	3700
xix)	Height of concrete plinth (mm)	:	150
xx)	Minimum height of the lowest part of the support insulator from ground liner (mm)	:	3194
xxi)	Minimum creepage distance of support insulator (mm)	:	1116 mm (31 mm/kV)
xxii)	Minimum corona extinction voltage (kv rms)	:	92
xxiii)	Standard value of rated transient recovery voltage for terminal fault	:	As per IEC-56
xxiv)	Standard value of rated line Characteristics for short line faults	:	

S. NO.	DESCRIPTION	VALUES
	RRRV	: KV/ms=0.214
	Surge Peak Factor	: K=1.6 A
	Impedance	: 450
xxv)	Rated operating duty cycle	: O-0.3 Second - CO-3 Minutes-CO
	b) Auto reclosing	: Suitable for three phase Auto reclosing duty
xxvi)	Rated insulation level under heavy pollution condition 1.2/50 micro second lightning Impulse withstand voltage (KV peak) to earth	: 170 KV
xxvii)	Power frequency withstand voltage KV (rms) to earth (KV rms)	: 70 KV
xxviii)	Rated characteristic for out of Phase breaking	:
	a) Out of phase breaking capacity	: 25% of rated breaking capacity
	b) Standard values of transient recovery	: As oper IEC-56
	c) Operating mechanism	: Spring operated, Anti pumping and Trip free mechanism
	d) Power available for operating mechanism	: Three phase 415 Volts 50 C/S or single phase 50 C/S 240 volts
xxix)	a) Rated supply voltage of closing and operating devices and auxiliary circuits	: 1)220 VDC/110 VDC 2)240 Volts AC 50 C/S single phase 3)415 volts 50 Hz three phase
	b) Permissible voltage variation	: 1)In case of DC Power supply voltage variation shall be between 85% to 110% of normal voltage. 2)In case of AC power supply voltage variation shall be of the normal voltage as per IS-15% to +10%.
	c) Permissible frequency	: $\pm 3\%$ from normal 50 Hz as per IS 2026 part-I 1977 para 4.4
	d) Combined variation of frequency and voltage	: $\pm 10\%$
xxx)	Auxiliary contacts (number & rating)	: 12 NO and 12 NC on each pole having continuous current rating of 10 Amps. DC breaking rating capacity shall be 2 Amps with circuit time constant less than 20 ms at 220/30 volts DC
xxxi)	Number of trip coils	: Two trip coils and 1 close coil with anti-pumping arrangement
xxxii)	Rated terminal load	: 100 kg. Static.

S. NO.	DESCRIPTION		VALUES
			The breaker shall be designed to withstand the rated terminal load, wind, load, earthquake load and short circuit forces
xxxiii)	Noise level of the equipment	:	Not exceeding 140 db
xxxiv)	ladder	:	Necessary platform with ladder shall be provided for local operation/maintenance to ease out accessible reach
xxxv)	Galvanisation Thickness of Supporting structure	:	125 microns

4.3.1 DRAWINGS AND INSTRUCTION MANUALS

Following drawings for each item are to be supplied as part of the contract.

- i) General outline drawings, showing dimensions, front and side elevations and plan of the circuit breaker and its local control panel.
- ii) Outline drawing of bushings showing dimensions and number of sheds and creepage distance.
- iii) Assembly and sub-assembly drawings with numbered parts.
- iv) Sectional views showing the general constructional features, operating mechanism and are extinguishing chamber, etc.
- v) Dimension and assembly of important auxiliaries.
- vi) Detailed drawings of operating mechanism. And inter-phase mechanism.
- vii) Test certificates.
- viii) Detailed drawings of mounting structure.
- ix) Spare parts and catalogue
- x) Wiring diagram showing the local and remote-control scheme of breaker including alarms indication devices instruments relay and timer wiring.
- xi) Write up on working of control schematic of breaker.
- xii) Foundation plan including weights of various components and impact loadings for working foundation design. Three copies for each pkg. of the above drawings and instruction manuals covering instructions for installations, operation and maintenance shall be supplied by the contractor(s) without any extra cost.

4.4.0 TECHNICAL SPECIFICATION OF OUTDOOR CURRENT AND POTENTIAL TRANSFORMERS

4.4.1 SCOPE OF CONTRACT

4.4.1.1 This Section of the Specification covers general requirements for design, engineering, manufacture, assembly and testing at manufacturer's works of 33 kV outdoor Current and Potential Transformers.

4.4.2 STANDARDS

4.4.2.1 The equipment covered by this specification shall, unless otherwise stated be designed, constructed and tested in accordance with the latest revisions of relevant Indian Standards and shall conform to the regulations of local statutory authorities.

4.4.2.2 In case of any conflict between the Standards and this specification, this specification shall govern.

4.4.2.3 The current transformer shall comply also with the latest issue of the following Indian standard.

- (i) IS: 2705(Part-I) Current transformers: General requirement.

- (ii) IS: 2705(Part-II) Current transformers: Measuring Current transformers
- (iii) IS: 2705(Part-III) Current transformers: Protective Current transformers
- (iv) IS: 2705(Part-IV) Current transformers: Protective Current transformers for special purpose application.
- (v) IS: 3156(Part-I) Potential transformers: General requirement.
- (vi) IS: 3156 (Part-II) Potential transformers: Measuring Potential transformers
- (vii) IS: 3156 (Part-III) Potential transformers: Protective Potential transformers

4.4.3 GENERAL REQUIREMENTS

- 4.4.3.1 The cores of the instrument transformers shall be of high grade, non-aging CRC steel of low hysteresis loss and high permeability.
- 4.4.3.2 Instrument transformers shall be of Dead Tank design or Live Tank design.
- 4.4.3.3 The instrument transformers shall be truly hermetically sealed to completely prevent the oil inside the tank coming into contact with the outside temperature. To take care of oil volume variation the tenderer is requested to quote the current transformers with stainless steel diaphragm (bellow).
- 4.4.3.4 The instrument transformers shall be completely filled with oil.
- 4.4.3.5 A complete leak proof secondary terminal arrangement shall be provided with each instrument transformers, secondary terminal shall be brought into weather, dust and vermin proof terminal box. Secondary terminal boxes shall be provided with facilities for easy earthing, shorting, insulating and testing of secondary circuits. The terminal boxes shall be suitable for connection of control cable gland.
- 4.4.3.6 All instrument transformers shall be of single-phase unit.
- 4.4.3.7 The instrument transformers shall be so designed to withstand the effects of temperature, wind load, short circuit conditions and other adverse conditions.
- 4.4.3.8 All similar parts, particularly removable ones, shall be interchangeable with one another.
- 4.4.3.9 All cable ferrules, lugs, tags, etc. required for identification and cabling shall be supplied complete for speedy erection and commissioning as per approved schematics.
- 4.4.3.10 The instrument transformers shall be designed to ensure that condensation of moisture is controlled by proper selection of organic insulating materials having low moisture absorbing characteristics.
- 4.4.3.11 All steel work shall be degreased, pickled and phosphated and then applied with two coats of Zinc Chromate primer and two coats of finishing synthetic enamel paint.

4.4.4 INSULATING OIL

- 4.4.4.1 The quantity of insulating oil for instrument transformers and complete specification of oil shall be stated in the tender. The insulating oil shall conform to the requirement of latest edition of IS: 335

4.4.5 COMMON MARSHALLING BOXES

- 4.4.5.1 The outdoor type common marshalling boxes shall conform to the latest edition of IS 5039 and other general requirements specified hereunder.

- 4.4.5.2 The common marshalling boxes shall be suitable for mounting on the steel mounting structures of the instrument transformers.
- 4.4.5.3 One common marshalling box shall be supplied with each set of instrument transformers. The marshalling box shall be made of sheet steel and weather proof. The thickness of sheet steel used shall be not less than 3.0 mm. It is intended to bring all the secondary terminals to the common marshalling.
- 4.4.5.4 The enclosures of the common marshalling boxes shall provide a degree of protection of not less than IP 55 (As per IS 2147).
- 4.4.5.5 The common marshalling boxes shall be provided with double hinged front doors with pad locking arrangement. All doors and removable covers and plates shall be sealed all around with neoprene gaskets or similar arrangement.
- 4.4.5.6 Each marshalling box shall be fitted with terminal blocks made out of moulded non-inflammable plastic materials and having adequate number of terminals with binding screws washers etc. Secondary terminals of the instrument transformers shall be connected to the respective common marshalling boxes. All outgoing terminals of each instrument transformer shall terminate on the terminal blocks of the common marshalling boxes. The terminal blocks shall be arranged to provide maximum accessibility to all conductor terminals.
- 4.4.5.7 Each terminal shall be suitably marked with identification numbers. Not more than two wires shall be connected to any one terminal. **At least 20 % spare terminals shall be provided over and above the required number.**
- 4.4.5.8 All terminal strips shall be of isolating type terminals and they will be of minimum 10 A continuous current rating.
- 4.4.5.9 All cable entries shall be from bottom. Suitable removable gland plate shall be provided on the box for this purpose. Necessary number of cable glands shall be supplied fitted on to this gland plate. Cable glands shall be screw on type and made of brass.
- 4.4.5.10 Each common marshalling box shall be provided with two numbers of earthing terminals of galvanized bolt and nut type.
- 4.4.5.11 All steel, inside and outside work shall be degreased, pickled and phosphate and then applied with two coats of Zinc Chromate primer and two coats of finishing synthetic enamel paint. The colour of finishing paint shall be as follows: -
- i) Inside: Glossy White
 - ii) Outside: Light Grey (Shade No. 697 of IS: 5)

4.4.6 BUSHINGS AND INSULATORS

- 4.4.6.1 Bushings and Insulators shall be of Porcelain, Solid core type. Porcelain used for the manufacture of bushings and insulators shall be homogeneous, free from defects, cavities and other flaws or imperfections that might affect the mechanical or dielectric quality and shall be thoroughly vitrified, tough and impervious to moisture.
- 4.4.6.2 Glazing of the porcelain shall be of uniform brown colour, free from blisters, burns and other similar defects. Bushings shall be designed to have sufficient mechanical strength and rigidity for the conditions under which they will be used. All bushings of identical ratings shall be interchangeable.
- 4.4.6.3 Puncture strength of bushings shall be greater than the dry flashover value. When operating at normal voltage, there shall be no electric discharge between the conductors and bushing which would cause corrosion or injury to conductors, insulators or supports by the formation of substances produced by

chemical action. No radio interference shall be caused by the bushings when operating at the normal rated voltage.

4.4.6.4 The design of bushing shall be such that the complete bushing is a self-contained unit and no audible discharge shall be detected at a voltage up to a working voltage (Phase Voltage) plus 10%. The minimum creepage distance for severely polluted atmosphere shall be 25 mm/KV.

4.4.6.5 Sharp contours in conducting parts should be avoided for breakdown of insulation. The insulators shall be capable to withstand the seismic acceleration of 0.5 g in horizontal direction and 0.6g in vertical direction.

4.4.6.6 Bushings shall satisfactorily withstand the insulation level specified in data sheet.

4.4.7 TESTS

2.4.1.1 Routine/Acceptance Tests (all units)

2.4.1.2 All routine tests shall be carried out in accordance with relevant Standards. All routine/acceptance tests shall be witnessed by the Purchaser/his authorized representative.

2.4.1.3 **Type Tests:** The bidder shall furnish type test certificates and results for the all tests as per relevant Standards along with the bid for current and potential transformers of identical design.

2.4.1.4 Type test certificates so furnished shall not be older than 5 (five) years as on date of Bid opening.

4.4.8 NAME PLATES

4.4.8.1 All equipment shall have non-corrosive name plates fix at a suitable position indelibly mark with full particular there on in accordance with the standard adapted.

4.4.9 MOUNTING STRUCTURES

4.4.9.1 All the equipment covered under this specification shall be suitable for mounting on steel structures.

4.4.9.2 Supply of mounting structures is also in the scope of this tender.

4.4.9.3 Each equipment shall be furnished complete with base plates, clamps, and washers etc. and other hardware ready for mounting on existing steel structures.

4.4.10 SAFETY EARTHING

2.4.10.1. The non-current carrying metallic parts and equipment shall be connected to station earthing grid.

For these two terminals suitable for 40mm X 10mm GI strip shall be provided on each equipment.

4.4.11 TERMINAL CONNECTORS

4.4.11.1 The equipment shall be supplied with required number of terminal connectors of approved type suitable for ACSR. The type of terminal connector, size of connector, material, and type of installation shall be approved by the Purchaser, as per installation requirement while approving the equipment drawings.

4.4.12 TECHNICAL DATA SHEET FOR CURRENT AND POTENTIAL TRANSFORMERS

4.4.12.1 For 132 & 33 kV CTs the instrument security factor at all ratios shall be less than five (5) for metering core. If any auxiliary CTs/reactor are used in the current transformers then all parameters specified shall have to be met treating auxiliary CTs as an integral part of the current transformer. The auxiliary CTs/reactor shall preferably be inbuilt construction of the CTs. In case these are to be mounted separately these shall be mounted in the central marshalling box suitably wired up to the terminal blocks.

4.4.12.2 TYPE AND RATING:

All instrument transformer shall be outdoor type, single phase, oil immersed, self-cooled suitable for mounting on steel structure. The instrument transformer shall have the following ratings and particulars.

Item	Ratings and Particulars	
	(A) Nominal system voltage	132kV
(B) Highest system voltage, kV	145	36
(C) Rated frequency, HZ	50	50
(D) System earthing	Solidly earth	Solidly earth
(E) Insulation level		
(a) Impulse withstand voltage: kVp	550	170
(b) One-minute p.f. Withstand voltage, kV (r.m.s.)	230	70
(F) Short time current for one second, kA	31.5	20
(G) Minimum creepage distance, mm	As per ISS	As per ISS
(H) Temperature rise		
(I) Feeder/ BYPASS/ Bus Coupler CT		
(i) No. of Cores	3	2
(ii) Transformation Ratio	As per schedule of requirement	
(iii) Rated Output		
(a) Core-1	30 VA	30 VA
(b) Core-2	15 VA	15 VA
(c) Core-3		N.A
(iv) Accuracy Class		
(a) Core-1	0.2	0.2
(b) Core-2	5P	5P
(c) Core-3	PS	N.A
(v) Accuracy Limit Factor		
(a) Core-1	--	-
(b) Core-2	10	10
(c) Core-3	-	-
(vi) Instrument security factor		
(a) Core-1	<5	<5
(b) Core-2	-	-
(c) Core-3	-	-
(vii) Minimum Knee point voltage, Volts		
(a) Core-1	-	-
(b) Core-2	-	-
(c) Core-3	1200	-
(viii) Maximum secondary resistance, ohm		
(a) Core-1	-	-
(b) Core-2	-	-
(c) Core-3	3	N.A
(ix) Maximum exciting current, at $V_k/4$ mA		
(a) Core-1	-	-
(b) Core-2	-	-
(c) Core-3 (at $V_k/4$)	30	N.A
(J) Transformer CT		
(i) No. of Cores	3	2
(ii) Transformation Ratio	As per schedule of requirement	
(iii) Rated Output	3	3
(b) Core-1	30 VA	30 VA
(b) Core-2	15 VA	15 VA
(c) Core-3	-	-
(iv) Accuracy Class		

(a) Core-1	0.2	0.2
(b) Core-2	5P	5P
(c) Core-3	PS	PS
(v) Accuracy Limit Factor		
(a) Core-1	--	-
(b) Core-2	10	10
(c) Core-3	-	-
(vi) Instrument security factor		
(a) Core-1	<5	<5
(b) Core-2	-	-
(c) Core-3	-	-
(vii) Minimum Knee point voltage, Volts		
(a) Core-1	-	-
(b) Core-2	-	-
(c) Core-3	1200	600
(viii) Maximum secondary resistance, ohm		
(a) Core-1	-	-
(b) Core-2	-	-
(c) Core-3	3	3
(ix) Maximum exciting current, at $V_k/4$ mA		
(a) Core-1	-	-
(b) Core-2	-	-
(c) Core-3 (at $V_k/4$)	30	15
POTENTIAL TRANSFORMER		
(i) No. of secondary windings		2
(ii) Transformation ratio		
(a) Winding I	$132kV/\sqrt{3}$	$33kV/\sqrt{3}$
(b) Winding II	$/ 110V/\sqrt{3}$	$/ 110V/\sqrt{3}$
(iii) Rated out put		
(a) Winding I	500	200
(b) Winding II	200	100
(vi) Accuracy class		
(a) Winding I	0.2	0.2
(b) Winding II	3P	3P
(v) Rated voltage factor	1.2	1.2

Note: It is intended to use different ratios of the same CT at the same time for various protections and metering cores. The CTS should therefore be suitable for the above purpose by secondary tapings only. The ratio change by secondary taps is acceptable as long as the required CT specifications are achieved at all ratios.

- (i) The knee point voltage specified above shall be at higher ratio/ taps.

4.5.0 TECHNICAL SPECIFICATION OF ISOLATORS

4.5.1 SCOPE

- 4.5.1.1 This section of the specification is intended to cover design specifications for manufacture and testing of 132kV and 33 KV gang operated Isolators with all fittings and accessories.
- 4.5.1.2 The Isolators are for outdoor installation suitable for horizontally mounting on mounting structures and for use at sub-stations.
- 4.5.1.3 Isolators shall be supplied with Earth Switch as and where specified.
- 4.5.1.4 The bidder shall offer ac motor operated Isolators and earth switches.

4.5.2 GENERAL

- 4.5.2.1 The Isolators and accessories shall conform in general to IS 9921 (or IEC: 62271-102) except to the extent explicitly modified in specification.
- 4.5.2.2 All isolating switches and earthing switches shall have rotating blades and pressure releasing contacts. All isolating and earth switches shall operate through 90° angle from closed position to fully open position.
- 4.5.2.3 Complete isolator with all the necessary items for successful operation shall be supplied including but not limited to the following:
- (i). Isolator assembled with complete base frame, linkages, operating mechanism, control cabinet, interlocks etc.
 - (ii). All necessary parts to provide a complete and operable isolator installation, control parts and other devices whether specifically called for herein or not.
 - (iii) The isolator shall be designed for use in the geographic and meteorological conditions as given in Section 1.

4.5.3 DUTY REQUIREMENTS

- 4.5.3.1 Isolators and earth switches shall be capable of withstanding the dynamic and thermal effects of the maximum possible short circuit current of the systems in their closed position. They shall be constructed such that they do not open under influence of short circuit current.
- 4.5.3.2 The earth switches, wherever provided, shall be constructionally interlocked so that the earth switches can be operated only when the isolator is open and vice versa. The constructional interlocks shall be built in construction of isolator and shall be in addition to the electrical and mechanical interlocks provided in the operating mechanism.
- 4.5.3.3 In addition to the constructional interlock, isolator and earth switches shall have provision to prevent their electrical and manual operation unless the associated and other interlocking conditions are met. All these interlocks shall be of failsafe type. Suitable individual interlocking coil arrangements shall be provided. The interlocking coil shall be suitable for continuous operation from DC supply and within a variation range as stipulated elsewhere in this specification.
- 4.5.3.4 The earthing switches shall be capable of discharging trapped charges of the associated lines.
- 4.5.3.5 The isolator shall be capable of making/breaking normal currents when no significant change in voltage occurs across the terminals of each pole of isolator on account of make/break operation.

4.5.3.6 The isolator shall be capable of making/breaking magnetizing current of 0.7A at 0.15 power factor and capacitive current of 0.7A at 0.15 power factor at rated voltage.

4.5.4 CONSTRUCTIONAL DETAILS

4.5.4.1 All isolating switches and earthing switches shall have rotating blades and pressure releasing contacts. All isolating and earth switches shall operate through 90° angle from closed position to fully open position.

4.5.4.2 **Contacts:**

4.5.4.3 The contacts shall be self-aligning and self-cleaning and so designed that binding cannot occur after remaining closed for prolonged periods of time in a heavily polluted atmosphere.

4.5.4.4 No undue wear or scuffing shall be evident during the mechanical endurance tests. Contacts and spring shall be designed so that readjustments in contact pressure shall not be necessary throughout the life of the isolator or earthing switch. Each contact or pair of contacts shall be independently sprung so that full pressure is maintained on all contacts at all time.

4.5.4.5 Contact springs shall not carry any current and shall not lose their characteristics due to heating effects.

4.5.4.6 The moving contact of double break isolator shall have turn-and -twist type or other suitable type of locking arrangement to ensure adequate contact pressure.

4.5.4.7 **Blades:**

4.5.4.8 All metal parts shall be of non-rusting and non-corroding material. All current carrying parts shall be made from high conductivity electrolytic copper/aluminum. Bolts, screws and pins shall be provided with lock washers. Keys or equivalent locking facilities if provided on current carrying parts, shall be made of copper silicon alloy or stainless steel or equivalent. The bolts or pins used in current carrying parts shall be made of non-corroding material. All ferrous castings except current carrying parts shall be made of malleable cast iron or cast-steel. No grey iron shall be used in the manufacture of any part of the isolator.

4.5.4.9 The live parts shall be designed to eliminate sharp joints, edges and other corona producing surfaces, where this is impracticable adequate corona shield shall be provided. Corona shields/rings etc., shall be made up of copper/aluminum alloy.

4.5.4.10 Isolators and earthing switches including their operating parts shall be such that they cannot be dislodged from their open or closed positions by short circuit forces, gravity, wind pressure, vibrations, shocks, or accidental touching of the connecting rods of the operating mechanism.

4.5.4.11 The switch shall be designed such that no lubrication of any part is required except at very infrequent intervals i.e. after every 1000 operations or after 5 years whichever is earlier.

4.5.4.12 **Insulators:**

4.5.4.13 The insulator shall conform to IS: 2544 and/or IEC-60168. The insulators shall have a minimum cantilever strength of 600/400 Kg. for 145/33 kV insulators respectively.

4.5.4.14 Pressure due to the contact shall not be transferred to the insulators after the main blades are fully closed.

4.5.4.15 **Base:**

Each isolator shall be provided with a complete galvanized steel base provided with holes and designed for mounting on a supporting structure.

4.5.5 EARTHING SWITCHES

- 4.5.5.1 Where earthing switches are specified, these shall include the complete operating mechanism and auxiliary contacts.
- 4.5.5.2 The earthing switches shall form an integral part of the isolator and shall be mounted on the base frame of the isolator.
- 4.5.5.3 The earthing switches shall be constructionally interlocked with the isolator so that the earthing switches can be operated only when the isolator is open and vice versa. The constructional interlocks shall be built in construction of isolator and shall be in addition to the electrical interlocks.
- 4.5.5.4 Suitable mechanical arrangement shall be provided for de-linking electrical drive for mechanical operation.
- 4.5.5.5 Each earth switch shall be provided with flexible copper/aluminum braids for connection to earth terminal. These braids shall have the same short time current carrying capacity as the earth blade. The transfer of fault current through swivel connection will not be accepted.
- 4.5.5.6 The frame of each isolator and earthing switches shall be provided with two reliable earth terminals for connection to the earth mat.
- 4.5.5.7 Isolator design shall be such as to permit addition of earth switches at a future date. It should be possible to interchange position of earth switch to either side.
- 4.5.5.8 The earth switch should be able to carry the same fault current as the main blades of the Isolators and shall withstand dynamic stresses.

4.5.6 OPERATING MECHANISM

- 4.5.6.1 The bidder shall offer motor operated Isolators and earth switches. Earth Switches of 36 kV shall only be manual operated.
- 4.5.6.2 Control cabinet/operating mechanism box shall be made of aluminum sheet of adequate thickness (minimum 3 mm).
- 4.5.6.3 A “Local/Remote” selector switch and a set of open/ close push buttons shall be provided on the control cabinet of the isolator to permit its operation through local or remote push buttons.
- 4.5.6.4 Provision shall be made in the control cabinet to disconnect power supply to prevent local/remote power operation.
- 4.5.6.5 Suitable reduction gearing shall be provided between the motor and the drive shaft of the isolator. The mechanism shall stop immediately when motor supply is switched off. If necessary, a quick electromechanical brake shall be fitted on the higher speed shaft to effect rapid braking.
- 4.5.6.6 Manual operation facility (with handle) should be provided with necessary interlock to disconnect motor.
- 4.5.6.7 Gear should be of forged material suitably chosen to avoid bending/jamming on operation after a prolonged period of non-operation. Also, all gear and connected material should be so chosen/surface treated to avoid rusting.

4.5.7 OPERATION

- 4.5.7.1 The main Isolator and earth switches shall be gang operated.
- 4.5.7.2 The design shall be such as to provide maximum reliability under all service conditions. All operating linkages carrying mechanical loads shall be designed for negligible deflection. The length of inter insulator and interpole operating rods shall be capable of adjustments, by means of screw thread which can be locked with a lock nut after an adjustment has been made. The isolator and earth switches shall be provided with “over center” device in the operating mechanism to prevent accidental opening by wind, vibration, short circuit forces or movement of the support structures.
- 4.5.7.3 Each isolator and earth switch shall be provided with a manual operating handle enabling one man to open or close the isolator with ease in one movement while standing at ground level. Detachable type manual operating handle shall be provided. Suitable provision shall be made inside the operating mechanism box for parking the detached handles. The provision of manual operation shall be located at a height of 1000 mm from the base of isolator support structure.
- 4.5.7.4 The isolator shall be provided with positive continuous control throughout the entire cycle of operation. The operating pipes and rods shall be sufficiently rigid to maintain positive control under the most adverse conditions and when operated in tension or compression for isolator closing. They shall also be capable of withstanding all torsion and bending stresses due to operation of the isolator. Wherever supported the operating rods shall be provided with bearings on either end. The operating rods/ pipes shall be provided with suitable universal couplings to account for any angular misalignment.
- 4.5.7.5 All rotating parts shall be provided with grease packed roller or ball bearings in sealed housings designed to prevent the ingress of moisture, dirt or other foreign matter. Bearings pressure shall be kept low to ensure long life and ease of operation. Locking pins wherever used shall be rustproof.
- 4.5.7.6 Signaling of closed position shall not take place unless it is certain that the movable contacts, have reached a position in which rated normal current, peak withstand current and short time withstand current can be carried safely. Signaling of open position shall not take place unless movable contacts have reached a position such that clearance between contacts is at least 80% of the isolating distance.
- 4.5.7.7 The position of movable contact system (main blades) of each of the Isolators and earthing switches shall be indicated by a mechanical indicator at the lower end of the vertical rod of shaft for the Isolators and earthing switch. The indicator shall be of metal and shall be visible from operating level.
- 4.5.7.8 The Supplier shall furnish the following details along with quality norms, during detailed engineering stage.
- (i) Current transfer arrangement from main blades of isolator along with millivolt drop immediately across transfer point.
 - (ii) Details to demonstrate smooth transfer of rotary motion from motor shaft to the insulator along with stoppers to prevent over travel.

4.5.8 TEST AND INSPECTION

- 4.5.8.1 The switches shall be subjected to the following type test in accordance to with IS: 9920.
- i. Dielectric test (impulse and one minute) power frequency withstands voltage.
 - ii. Temperature rise test
 - iii. Rated off load breaking current capacity
 - iv. Rated active load breaking capacity
 - v. Rated line charging breaking capacity

- vi. Rated short time current
- vii. Rated peak withstand current
- viii. Mechanical and Electrical Endurance

4.5.8.2 The equipment shall be subjected to the following routine test.

- (i) Power frequency voltage dry test
- (ii) Measurement of resistance of the main circuit
- (iii) Operating test.

4.5.8.3 The porcelain will have pull out test for embedded component and beam strength of porcelain base.

4.5.9 AUXILIARY SWITCHES

4.5.9.1 All isolators and earth switches shall be provided with 220/110 volts, 6 Ampere auxiliary switches for their remote position indication on the control board and for electrical interlocking with other equipment. In addition to the auxiliary switches required for remote position indications and for their operation. There shall be six pairs of NO and six pairs of NC contacts for each isolating switch and three pairs of NO and three pairs of NC contacts for each earthing switch. All contacts shall be brought out to terminal blocks

4.5.10 CONNECTORS

4.5.10.1 Each isolator shall be provided with appropriate number of bimetallic clamping type connectors as detailed in the schedule of requirement. The maximum length of jumper that may be safely connected or any special instruction considered necessary to avoid under loads on the post isolators should be stated by the bidder.

4.5.11 MOUNTING STRUCTURES

4.5.11.1 All isolators and earthing switches shall be rigidly mounted in an upright position on their own supporting structures. Details of the supporting structures shall be furnished by the successful tenderer. The isolators should have requisite fixing details ready for mounting them on structures.

4.5.12 TECHNICAL DATA SHEET FOR ISOLATORS

No.	Technical Particulars	Isolators class
		33 kV
1	Nominal system voltage, kV	33
2	Highest system voltage, kV	36
3	Rated frequency, Hz.	50
4.	Type of Isolator	Double Break, centre pole rotating
5	Rated continuous current, A	1250
6	Rated short time current, kA	25
7	Rated duration of short time current, (second)	1
8	Rated lightning impulse withstand voltage, kV (peak)	
	i) To earth & between poles	170

	ii) Across isolating distance	180
9	Rated 1 minute power frequency withstand voltage, kV (rms)	
	i) To earth & between poles	70
	ii) Across isolating distance	80
10	Minimum Creepage distance of insulators, mm	31mm/kV
11	Temperature rise	As per relevant IS

4.6.0 TECHNICAL SPECIFICATION FOR SURGE ARRESTORS

4.6.1 SCOPE

4.6.1.1 This Section covers the specifications for design, manufacture, shop & factory testing before dispatch of 33 kV 10 kA, Station class heavy duty, gapless metal (zinc) oxide Surge Arrestors complete with fittings & accessories.

4.6.2 STANDARDS

4.6.2.1 The design, manufacture and performance of Surge Arrestors shall comply with IS: 3070 Part-3 unless otherwise specifically specified in this Specification

4.6.3 GENERAL REQUIREMENT

4.6.3.1 The surge arrester shall draw negligible current at operating voltage and at the same time offer least resistance during the flow of surge current.

4.6.3.2 The surge arrester shall consist of non-linear resistor elements placed in series and housed in electrical grade porcelain housing/silicon polymeric of specified creepage distance.

4.6.3.3 The assembly shall be hermetically sealed with suitable rubber gaskets with effective sealing system arrangement to prevent ingress of moisture.

4.6.3.4 The surge arrester shall be provided with line and earth terminals of suitable size. The ground side terminal of surge arrester shall be connected with 25x6 mm galvanized strip, one end connected to the surge arrester and second end to a separate ground electrode. The bidder shall also recommend the procedure which shall be followed in providing the earthing/system to the Surge Arrester.

4.6.3.5 The surge arrester shall not operate under power frequency and temporary over voltage conditions but under surge conditions, the surge arrester shall change over to the conducting mode.

4.6.3.6 The surge arrester shall be suitable for circuit breaker performing 0-0.3sec.-CO-3min-CO- duty in the system.

4.6.3.7 Surge arrestors shall have a suitable pressure relief system to avoid damage to the porcelain/ silicon polymeric housing and providing path for flow of rated fault currents in the event of arrester failure.

4.6.3.8 The reference current of the arrester shall be high enough to eliminate the influence of grading and stray capacitance on the measured reference voltage.

4.6.3.9 The Surge Arrester shall be thermally stable and the bidder shall furnish a copy of thermal stability test with the bid.

4.6.3.10 The arrester shall be capable of handling terminal energy for high surges, external pollution and transient over voltage and have low losses at operating voltages.

4.6.4 ARRESTOR HOUSING

4.6.4.1 The arrester housing shall be made up of porcelain/**silicon polymeric** housing and shall be homogenous, free from laminations, cavities and other flaws of imperfections that might affect the mechanical and dielectric quality. The housing shall be of uniform brown colour, free from blisters, burrs and other similar defects.

- 4.6.4.2 Arrestors shall be complete with insulating bases, fasteners for stacking units together, surge counters with leakage current meters and terminal connectors.
- 4.6.4.3 The **housing shall be so coordinated that external flashover shall not occur due to application of** any impulse or switching surge voltage up to the maximum design value for arrester. The arrestors shall not fail due to contamination. The arrester housings shall be designed for pressure relief class as given in Technical Parameters of the specification.
- 4.6.4.4 Sealed housings shall exhibit no measurable leakage.

4.6.5 FITTINGS & ACCESSORIES

- 4.6.5.1 The surge arrester shall be complete with insulating bases, fasteners for stacking units together, surge counters with leakage current meters and terminal connectors.
- 4.6.5.2 The terminals shall be non-magnetic, corrosion proof, robust and of adequate size and shall be so located that incoming and outgoing connections are made with minimum possible bends. The top metal cap and base of surge arrester shall be galvanized. The line terminal shall have a built-in clamping device which can be adjusted for both horizontal and vertical takeoff.
- 4.6.5.3 Grading corona control rings, if necessary, shall be provided on each complete arrester pole for proper stress distribution.

4.6.6 SURGE MONITOR

- 4.6.6.1 A self-contained discharge counter suitably enclosed for outdoor use and requiring no auxiliary or battery supply for operation shall be provided for each single pole unit. Leakage current meter with suitable scale range to measure leakage current of surge arrester shall also be supplied within the same enclosure. The number of operations performed by the arrester shall be recorded by a suitable cyclometric counter and surge monitor shall be provided with an inspection window. There shall be a provision for putting ammeter to record the current/alarm contacts in the control room if the leakage current exceeds the permitted value. Similar provision shall be considered for surge counter also.
- 4.6.6.2 Surge monitor shall be mounted on the support structure at a suitable height so that the reading can be taken from ground level through the inspection window and length of connecting leads up to grounding point and bends are minimum.

4.6.7 TESTS

4.6.7.1 Test on Surge Arrestors

The Surge Arrestors offered shall be type tested and shall be subjected to routine and acceptance tests in accordance with IS: 3070 (Part-3). In addition, the suitability of the Surge Arrestors shall also be established for the following:

Residual voltage test

Reference voltage test

Leakage current at M.C.O.V

P.D. test

Sealing test

Thermal stability test

Aging and Energy capability test

Watt loss test

Each metal oxide block shall be tested for guaranteed specific energy capability in addition to routine/acceptance test as per IEC/IS.

4.6.7.2 The surge arrester housing shall also be type tested and shall be subjected to routine and acceptance tests in accordance with IS: 2071.

4.6.7.3 Galvanization Test

All Ferrous parts exposed to atmospheric condition shall have passed the type tests and be subjected to routine and acceptance tests in accordance with IS: 2633 & IS 6745.

4.6.8 NAME PLATE

4.6.8.1 The name plate attached to the arrester shall carry the following information:

Rated Voltage

Continuous Operation Voltage

Normal discharge current

Pressure relief rated current

Manufacturers Trade Mark

Name of Sub-station

Year of Manufacturer

Name of the manufacture

Purchase Order Number along with date

4.6.9 TECHNICAL DATA SHEET FOR SURGE ARRESTOR

	Particulars	Voltage class
		33 kV
1	Rated voltage of arrester, kV	30
2	Rated frequency, Hz	50 Hz
3	Nominal discharge current of arrester, kA	10
4	Maximum residual voltage at nominal discharge current, kV (peak)	108
5	Maximum steep current impulse residual voltage at kV (kVP)	120
6	One minute power frequency withstand voltage of arrester insulation, kV (rms)	70
7	1.2 / 50 μ second impulse withstand voltage of arrester insulation, kV (peak)	170
9	Line discharge class	2
10	Insulator Housing	
	Power frequency withstand test voltage(wet) (kV rms)	70
	Lightning impulse withstand tests voltage (KVp)	170
	Pressure Relief Class	40
	Creepage distance not less than (mm)	31mm/kV

4.7.0 Technical Specification for Control and Relay Panels (With Automation)

SCOPE

Turnkey Construction of one no. of 33kV Feeder Bay including Civil Works at 132kV Sipajhar GSS, AEGCL for providing power to NRL

This Section is intended to cover the design, manufacture, assembly, testing at manufacturer's works of Indoor Relay and Control Panels.

The Control and Relay Panels required are for control and protection of the Power Transformers, Feeders and for others according to requirements. The supply shall include all accessories, special tools, relevant software, supporting steels, spare parts, drawings, instruction manuals etc. The panels shall be supplied complete with all accessories as specified and completely assembled and all internal wiring completed.

The sub-stations will have automation as per guidelines of IEC 61850. The contractor has to supply the C&R panels to match the requirement of Sub-station Automation System (SAS) as specified in the subsequent chapter.

STANDARDS

All equipment and all component parts supplied under this specification shall conform in all respects to the latest issue of relevant Indian Standard Specifications except where specified otherwise in this specification. Equipment meeting any other authoritative standards which ensure an equal or better quality may also be acceptable.

TYPE OF PANEL

All panels shall be simplex type. One simplex panel shall be used for each feeder and bus coupler / by pass breaker. For transformer bays two simplex panels (one each for HV and LV sides) may be used if required.

Simplex Control and Relay Panels shall consist of vertical swing front panels with equipment mounted thereon and having front glass door. Each cubicle assembly shall be provided with doors on the rear having handles with built in locking facility. It shall have double leaf doors with lift off hinges at the back for panels of width more than 800 mm.

These panels shall be of the following approximate dimensions: Height: 2250mm + 15mm anti-vibration pad + 50 mm (base) Depth: 800mm (MAX)

Width: 800 mm to 1000 mm

CONSTRUCTIONAL FEATURES

The panels shall be completely metal enclosed to ensure a dust, moisture and vermin proof atmosphere. The enclosure shall provide a degree of protection not less than IP 31 in accordance with IS-2147

Panels shall be rigid free standing and floor mounting type and comprise of structural frames enclosed completely with specially selected texture finished, cold rolled sheet steel of thickness not less than 3mm for weight bearing members of the panels such as base frame, front sheet and door frames and not less than 2.0 mm for sides, door top and bottom portions. There shall be sufficient reinforcement to provide level surfaces, resistance to vibration and rigidity during transportation and installation.

All joints shall be made flush and all edges shall be bent at right angles and rounded. All structural members shall be bolted or welded together. Necessary arrangement shall be provided for bolting together the adjacent panels as well as for fastening them to the floor. The opening required for mounting the equipment shall be punched or cut and filed smooth.

All doors, removable covers and panels shall be sealed all around with synthetic rubber gaskets Neoprene/EPDM generally conforming to provision of IS 11149. However, XLPE gaskets can also be used for

fixing protective toughened glass doors. Ventilating louvers, if provided shall have screens and filters. The screens shall be made of either brass or GI wire mesh.

Panels shall have additional rolled channel plinth at the bottom with smooth bearing surface. The panels shall be fixed on the embedded foundation channels with intervening layers of anti-vibration strips made of shock absorbing materials which shall be supplied by the contractor.

MOUNTING OF EQUIPMENTS

All equipment on and in the panels shall be mounted and completely wired to the terminal blocks ready for external connection. All equipment on the front panels shall be mounted flush. Terminal markings shall be clearly visible.

INTERNAL WIRING

Panels shall be supplied completely with interconnecting wiring provided between all electrical devices mounted and wired in the panels and between the devices and terminal blocks for the devices to be connected to equipment outside the panels. When panels are located adjacent to each other all inter panel wiring and connections between the panels shall be furnished and wiring shall be carried out internally. These adjacent inter panel wiring shall be clearly indicated in the drawing furnished by the CONTRACTOR.

Wiring shall be carried out with 1100-Volt grade, single core, stranded copper conductor wires with PVC insulation. The minimum size of stranded copper conductor used for internal wiring shall be as follows:

(a) All circuits except instrument transformers circuits:

(b) Instrument transformers circuit:

1.5 sq. mm. per lead.

2.5 sq. mm. per lead.

Auxiliary bus wiring for AC and DC supplies, voltage transformer circuits, annunciation circuits and other common services shall be provided near the top of the panel running throughout the entire length of the panels.

Wire terminals shall be made with solder less clamping type of tinned copper lugs, which firmly grip the conductor and insulation. Insulated sleeves shall be provided at all the wire terminations. Engraved core identification plastic ferrules marked to correspond with panel wiring diagram shall be fitted at both ends of each wire. Ferrules shall fit tightly on the wires and shall not fall off when the wire is disconnected from blocks.

Interconnections to adjacent panels shall be brought out to a separate set of terminals blocks located near the slots or holes meant for taking the interconnecting wires. Arrangement shall permit easy inter connection to adjacent panels at site and wires for this purpose shall be provided by the CONTRACTOR looped and bunched properly inside the panel.

A laminated copy of total schematics is to be fixed on the inside of door.

TERMINAL BLOCKS

All internal wiring to be connected to the external equipment shall terminate on terminal blocks, preferably vertically mounted on the side of each panel. Terminal blocks shall be of 650 volts grade and have 10 amps continuous rating, moulded piece, complete with insulated barriers, stud type terminals, washers, nuts and lock

nuts. Terminal block designs include a white fibre-marking strip with clear plastic/silicon chip on terminal covers. Marking on the terminal strips shall correspond to block and terminal number on the wiring diagram.

Terminal blocks for current transformer and voltage transformer secondary leads shall be provided with test links and isolating facilities. Current transformer secondary leads shall also be provided with short circuiting and earthing facilities.

At least 20% spare terminals shall be provided on each panel and these terminals shall be uniformly distributed on all terminal blocks.

There shall be a minimum clearance of 250 mm between first row of terminal blocks and associated cable gland plates. Also, the clearance between two rows of terminal blocks shall be a minimum of 150mm. A steel strip shall be connected between adjacent terminal block rows at 450-mm intervals for support of incoming cables.

PAINTING

All Sheet steelwork shall be phosphated in accordance with IS 6005.

Oil grease, dirt and warp shall be thoroughly removed by emulsion cleaning. Rust and scale shall be removed by pickling with dilute acid followed by washing with running water, rinsing with slightly alkaline hot water and drying.

After phosphating, thorough rinsing shall be carried out with clean water followed by final rinsing with dilute dichromate solution and oven drying. The phosphate coating shall be sealed with application of 2(two) coats of ready mixed, stoving type zinc chromate primer. The first coat may be 'flash dried' while the second shall be stoved.

After application of the primer, two coats of finishing synthetic enamel paint shall be applied, each coat followed by stoving. The second finishing coat shall be applied after completion of tests. Exterior Paint shall be texture finishing with RAL 7032 paint shade.

Each coat of primer and finishing paint shall be of a slightly different shade to enable inspection of the painting.

The inside of the panels shall be glossy white.

A small quantity of finishing shall be supplied minor touching up required at site after installation.

NAME PLATES AND MARKINGS

All equipment mounted on front and rear side as well as equipment mounted inside the panel shall be provided with individual nameplates with equipment designation engraved. Also, on the top of the each panel on front as well as rear side large and bold name plates shall be provided for circuit /feeder designation.

All front mounted equipment shall be also provided at the rear with individual name plates engraved with Tag numbers corresponding to the one shown in the panel internal wiring to facilitate easy tracing of the wiring. The nameplates shall be mounted directly by the side of the respective equipment and shall not be hidden by the equipment wiring.

Nameplates shall be made of non-rusting metal or 3 ply lamicord. Nameplates shall be black with white engraved lettering.

MISCELLANEOUS ACCESSORIES

A 240 Volts, single-phase plug points shall be provided in the interior of each cubicle with ON-OFF switch for connection of headlamp.

Each panel shall be provided with a LED lighting fixtures for the interior illumination of the panel complete with all fittings, i.e. lamp, switch (controlled by panel door)

Each control panel shall be provided with necessary arrangements for receiving, distributing, isolating and fusing of D.C. and A.C. supplies of various control, AC-DC super vision, signaling, lighting and space heater circuits. MCBs of requisite capacity with fail indicators shall be used, HRC fuse is not acceptable. The main input A.C. and D.C. circuits will be protected with miniature circuit breakers.

EARTHING

All panels shall be equipped with an earth bus securely fixed along with inside base of the panels. The materials and the sizes of the bus bar shall be at least 25X4 mm copper. When several panels are mounted joining each other, the earth bus shall be made continuous and necessary connectors and clamps for this purpose shall be included in the scope of supply. Provisions shall be made for extending the earth bus bar to future adjoining panels on either side.

All metallic cases of equipment shall be connected to the earth bus by independent copper wires of size not less than 2.5 sq. mm. Earthing wire shall be connected on terminals with suitable clamp connectors and soldering shall not be permitted.

PT and CT secondary neutrals or common lead shall be earthed at one place only at the terminal blocks, where they enter the panels.

Technical Specification for SAMAST Compliant Interface Energy Meter (IEM)

1. Interface Energy Meters Technical Specification

The specification covers the design, engineering, manufacturing, assembly and testing of static/electronic Interface Energy Meters) compliant Tri-vector type, Four Quadrant, Bi-Directional Energy Meter, suitable for 3-ph 4wire connections solidly earthed system with balanced and un-balanced loads for a power factor range from zero to unity (lagging & leading), with initial and sustained accuracy of class 0.2s. The energy metering system specified herein shall be used for tariff metering for bulk, inter-utility power flows. Projection mounted type, static composite meter shall be installed for EHV/HV circuit, as a self-contained device for measurement of active energy transmittals in each successive 15 minute or 5-minute block etc. meeting the ABT requirements. These meters shall be integrated

in SAMAST framework as an when it goes live so the meter shall comply to SAMAST guidelines. The meter shall also be compatible for integration with SAS system. Necessary isolation and /or suppression shall also be built-in for protecting the meter from surges, voltage spikes, fault-current etc. that occurs in VT and CT circuits of extra high voltage switchyards.

2. Basic Features of Interface Energy Meters

- a) The energy metering system specified herein shall be used for tariff metering for bulk, inter-utility power flows, in different States of India. Static composite meter shall be installed at interface points as a self-contained device for measurement of Voltage (V), Frequency (f), Active (Wh) and Reactive (VARh) energy exchanged in each successive 5 min time block. All meters shall be compliant to IS 15959 and its latest amendments.
- b) Each meter shall have a unique identification code, which shall be marked permanently on its front, as well as in its memory. All meters supplied to as per this specification shall have their identification code starting with "IEM", which shall not be used for any other supplies. "IEM" shall be an eight-digit running serial number, further followed by "A" and "B" for the use with CT secondary of 1A and 5A respectively. This shall be mutually agreed between the buyer and the vendor.
- c) The meters shall be suitable for communication with external device like modem, DCU, etc. which shall be able to communicate with CDCS for local/remote data transfer. The meter shall compulsorily have at least 1 optical port for taking reading through Hand Held Unit (HHU).
- d) Auxiliary Supply to IEM- The meters shall normally operate with the power drawn from DC auxiliary power supply (Range 110V to 220V DC) to reduce the Voltage Transformer (VT) burden. In addition, there shall be provision to operate the meter from the Voltage Transformer (VT) secondary circuit having a rated secondary line-to-line voltage of 110V, and current transformers (CTs) having a rated secondary current of 1 A or 5A. Any further transformers/ transducers required for their functioning shall be in-built in the meters. Necessary isolation and/or suppression shall also be built-in, for protecting the meters from surges and voltage spikes that occur in the VT and CT circuits of extra high voltage switchyards. The reference frequency shall be 50Hz. Also, the meter shall have suitable tolerance (up to 15% either side) for DC supply.
- e) The meters shall safely withstand the usual fluctuations arising during faults etc. In particular, VT secondary voltages 115% of V_{ref} applied continuously and 190% of V_{ref} for 3.0 seconds, and CT secondary current 150% of I_{ref} applied continuously and 30 times of I_{ref} applied for 0.5 seconds shall not cause any damage to or maloperation of the meters.
- f) The meters shall continue to function for the remaining healthy phase(s), in case one or two phases of VT supply fails. In case of a complete VT supply failure, the computation of average frequency shall be done only for the period during which the VT supply was available in the 5-minute block. Any time block contraction or elongation for clock correction shall also be duly accounted for.
- g) The total burden imposed by a meter for measurement and operation shall be defined as per IS 14697. An automatic backup for continued operation of the meter's calendar-clock, and for retaining all data stored in its memory, shall be provided through a long-life battery, which shall be capable of supplying the required power for at least 2 years. The meters shall be supplied duly fitted with the batteries, which shall not require to be changed for at least 10 years, as long as total VT supply interruption does not exceed two years. The battery mounting shall be designed to facilitate easy battery replacement without affecting PCB of the meter.

- h) The meters shall fully comply with all stipulations in IS 14697 except those specifically modified by this specification. The reference ambient temperature shall be 27 °C.
- i) Each meter shall have a test output device (visual), as per clause 6.11 of IS 14697.1999, for checking the accuracy of active energy (Wh) measurement. The preferred pulsing rate is twenty (20) per Wh for CT sec-1A and four (4) per Wh for CT sec –5A. It shall be possible to couple this device to suitable testing equipment also.
- j) Exception Management- The three line-to-neutral voltage shall be continuously monitored and in case any of these falls below defined threshold (70% of Vref), meter shall have suitable indication on LED/ LCD. The meter shall also have provision for low voltage event logging in meter memory in case of any phase voltage going below a defined threshold. The time blocks in which such a voltage failure occurs/persists shall also be recorded in the meter’s memory with a symbol “*” if 3 Phase RMS voltage applied to the IEM is in between 5% to 70% of Vref and if Voltage is less than 5% of Vref, meter should record Zero voltage symbol "Z".
- k) Time Accuracy - Each meter shall have a built-in calendar and clock, having an accuracy of 10 seconds per month or better. The calendar and clock shall be correctly set at the manufacturer’s works. The date (year-month-day) and time (hour-min.-sec.) shall be displayed on the meter front on demand. Meter shall have the intelligence to synchronize the time with GPS (Local GPS/CDCS GPS/ NAVIC) signal and from PC using software. Limited time synchronization through meter communication port shall be possible at site. When an advance or retard command is given, twelve subsequent time blocks shall be contracted or elongated by five seconds each. All clock corrections shall be registered in the meter’s memory and suitably shown on print out of collected data.
- l) A touch key or push button shall be provided on the meter front for switching on the display and for changing from one indication to the next. The display shall switch off automatically about one minute after the last operation of touch key/push button. When the display is switched on, the parameter last displayed shall be displayed again, duly updated.
- m) The whole system shall be such as to provide a print out (both from the local PC, and from remote central computer) of the following format:

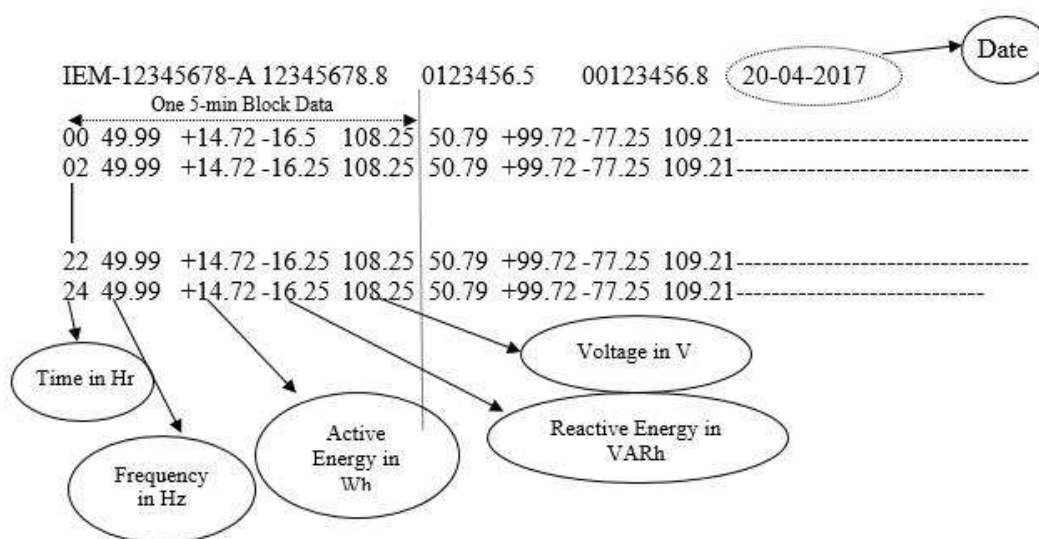


Figure 1: Standard Raw Data Format for IEM

There are 4 values in one 5 min time block. The first row shall contain the meter data for 2 hours, i.e., 24-time blocks, 00 hrs to 02:00 hrs. Similarly, the 2nd row shall contain the data for the next 2 hours and henceforth.

The above data shall be available in text file format (file extension as per IEEE standard/.txt) exportable to Excel. Indication of time retard or advance to be provided without disturbing the proposed format. Each 5-min block data consists of Frequency (in HZ), Active energy (in Wh), Reactive energy (in VARh) and Voltage (in V). All 5-minute Wh and VARh figures in NPC/output report shall be rounded off upto third decimal.

n) The portable Hand-Held unit (HHU)/ Common meter reading instrument (CMRI)/ Data Collecting Device (DCD) shall be having IS-15959:2011 compatibility for standardized parameters. The optical coupler for tapping data stored in the SEMs memory shall be compatible universally across different make of SEMs.

o) **Constructional Features**

- The meters shall be supplied housed in compact and sturdy, metallic or moulded cases of non-rusting construction and/or finish. The cases shall be designed for simple mounting on a plane, vertical surface such as a control/relay panel front. All terminals for CT and VT connections shall be arranged in a row along the meter's lower side. Terminals shall have a suitable construction with barriers and cover, to provide a secure and safe connection of CTs and VTs leads through stranded copper conductors of 2.5 sq. mm. size.
- All meters of the same model shall be totally identical in all respects except for their unique identification codes. They shall also be properly sealed and tamper evident, with no possibility of any adjustment at site, except for transactions allowed in IS 15959.
- The meters shall safely withstand, without any damage or mal operation, reasonable mechanical shocks, earthquake forces, ambient temperature variations, relative humidity etc. in accordance with IS-14697. They shall have an IP-51 category dust-tight construction, and shall be capable of satisfactory operation in an indoor, non-air-conditioned installation.
- Either the meters shall have built-in facility (e.g., test links in their terminals) for in-situ testing, or a separate test block shall be provided for each meter.

3. Measurement

- a) The active energy (Wh) measurement shall be carried out on 3-phase, 4-wire principle, with an accuracy as per class **0.2S** (IS 14697).
- b) The meter shall compute the net active energy (Wh) sent out from the substation bus bars during each successive 5 min block, and store it in its memory up to fourth decimal with plus sign if there is net Wh export and with a minus sign if there is net Wh import. Further Wh data in NPC/output report shall be rounded upto third decimal.
- c) The meter shall count the number of cycles in VT output during each successive 5 min block, and divide the same by 300 (60 sec/min x 5min) to arrive at the average frequency. The frequency data shall be stored in the meter's memory in Hertz up to third decimal. Further Frequency data in NPC/output report shall be rounded off upto second decimal.
- d) The meter shall continuously compute the average of the RMS values of the three line-to-neutral VT secondary voltages as a percentage of 63.51 V, and display the same on demand. The accuracy of the voltage measurement/computation shall be at least 0.5%, a better accuracy such as 0.2% in the 95-105%

range being desirable. The voltage data shall be stored in the meter's memory in volts up to third decimal. Further voltage data in NPC/output report shall be rounded off upto second decimal.

- e) The Reactive energy (VARh) measurement shall be carried out on 3-phase, 4-wire principle, with an accuracy of 0.5S as specified in IS 14697. The meter shall compute the net Reactive energy (VARh) sent out from the substation bus bars during each successive 5 min block, and store it in its memory up to fourth decimal with plus sign if there is net VARh export and with a minus sign if there is net VARh import. It shall also display on demand the net VARh sent out during the previous 5 min block. Further VARh data in NPC/output report shall be rounded off upto third decimal.
- f) The meter shall also integrate the reactive energy (VARh) algebraically into two separate registers, one for the period for which the average RMS voltage is above 103.0%, and the other for the period for which the average RMS voltage is below 97.0 %. The current reactive power (VAR), with a minus sign if negative, and cumulative reactive energy (VARh) readings of the two registers (>103% and <97%) shall be displayed on demand. The readings of the two registers at each midnight shall also be stored in the meter's memory. When reactive power is being sent out from substation bus bars, VAR display shall have a plus sign or no sign and VARh registers shall move forward. When reactive power flow is in the reverse direction, VAR display shall have negative sign and VARh registers shall move backwards. Generally, the standard PT ratios are 220 kV /110 V, 400 kV /110 V and 765 kV / 110 V. However, at the time of commissioning the vendor may confirm the same from site and configure the meter accordingly to ensure correct recording of reactive energy.
- g) For CT secondary rating of 5A, all computations, displays and memory storage shall be similar except that all figures shall be one fifth of the actual, worked out from CT and VT secondary quantities.
- h) Further, the meter shall continuously integrate and display on demand the net cumulative active energy sent out from the substation bus bars up to that time. The cumulative Wh reading at each midnight shall be stored in the meter's memory. The register shall move backwards when active power flows back to substation bus bars.
- i) Errors for different power factors shall be as defined in IS14697.
- j) For reactive power (VAR) and reactive energy (VARh) measurements, IS14697 shall be complied with. The accuracy of measurement of reactive energy shall be as per class 0.5S.
- k) The harmonics shall be filtered out while measuring Wh, V and VARh, and only fundamental frequency quantities shall be measured/computed.
- l) Data security shall be ensured as per IS 15959 (three layers of security).

4. Memory/ Storage

Each meter shall have a non-volatile memory in which the following shall be automatically stored:

- i. Average frequency for each successive 5 min block, in Hertz up to third decimals.
- ii. Net Wh transmittal during each successive 5 min block, up to fourth decimal, with plus sign if there is net Wh export and with a minus sign if there is net Wh import.
- iii. Net VARh transmittal during each successive 5 min block, up to fourth decimal, with plus sign if there is net VARh export and with a minus sign if there is net MVARh import.
- iv. Cumulative Wh transmittal at each midnight, in eight digits including one decimal.

- v. Cumulative VARh transmittal for voltage high condition, at each midnight in eight digits including one decimal.
- vi. Cumulative VARh transmittal for voltage low condition, at each midnight, in eight digits including one decimal.
- vii. Average RMS voltage for each successive 5min block.
- viii. Date and time blocks of failure of VT supply on any phase, as a star (*)/ (Z) mark.
- ix. The meters shall store all the above listed data in their memories for a period of fifteen (15) days. The data older than fifteen (15) days shall be erased automatically
- x. The software provided at CDCS, i.e., SLDC, will manage all functionalities of collection of data through DCUs, validate the data, store the data in a database, and manage the complete system. Software will also have a scheduler for scheduling the task of collection of data periodically. The periodicity of data collection shall be user defined.

5. Display

Each meter shall have digital display for indication of the following (one at a time), on demand:

- i. Meter serial no. and model: IEM12345678A or IEM12345678B
- ii. Date (year month day /yyyy mm dd): 20160311 d
- iii. Time (hour min sec /hh mm ss): 195527 t
- iv. Cumulative Wh reading: 1234567.8 C
- v. Average frequency of the previous block: 49.89 F
- vi. Net Wh transmittal during the previous block: - 28.75 E
- vii. Net VARh transmittal during the previous block: - 18.75 R
- viii. Average % Voltage: 99.2 U
- ix. Reactive power (VAR): 106.5 r
- x. Voltage - high VARh register reading: 1234567.5 H
- xi. Voltage - low VARh register reading: 1234567.4 L
- xii. Low battery indication
- xiii. The three line-to-neutral voltages shall be continuously monitored and in case any of these falls below 70 %, a preferably flashing three LEDs (one LED/phase) provided on meter's front shall become steady. They shall go off if all three voltages fall below 70 %. The LED shall automatically resume flashing when all VT secondary voltages are healthy again.
- xiv. The two VARh registers (xv and xvi) shall remain stay-put while VT supply is unhealthy.

Any other better or more informative mechanism to display the above shall be preferred. The above shall be mutually agreed between the meter buyer and vendor.

Navigation keys to be provided at the meter front plate to navigate the display menu.

6. Communication

- a) Each meter must have an optical port on its front for tapping all data stored in its memory through HHU. In addition to the above each meter shall also be provided with a RS-485, Ethernet and USB port on one of its sides, from where all the data stored in the meter's memory can also be transferred to CDCS (through DCU), local computer and external storage. The overall intention is to tap the data stored in the meter's memories at a scheduled time from any of the above-mentioned ports or any other means and transmit the same to a remote central computer using suitable means of communication. It shall be possible to securely download the IEM data through an USB port via external storage thereby removing the requirement of an MRI (Meter Reading Instrument). It shall be ensured that data transfer through USB shall be unidirectional only i.e., from Meter to external storage device in an authentication process. Meter data shall be tamper-proof.
- b) All meters shall be compatible with Optical port, RS-485 port, Ethernet port and USB / RS-232 port all together at a time and communicate independently. It shall also be possible to obtain a print out (hard copy) of all data collected from the meters, using the local PC. Data collection from any local laptop/PC shall be possible by installing data collection software. Entire project has to be based on Optic Fibre/GSM/4G/3G. Bidder should quote considering availability of Optic Fibre at 80% of locations and availability of PLCC/4G at 20 % of locations. This is for bringing all the bids on common platform. However, the selected agency will have to conduct detailed survey regarding availability of the particular service for all locations. The bidder may conduct Field Survey before submission of bid.
- c) The bidder shall adhere to the appropriate security algorithm for encryption and decryption

Entire project has to be based on Optic Fibre/GSM/4G/3G. Bidder should quote considering availability of Optic Fibre/PLCC/4G/3G/2G for all the locations. However, the selected agency will have to conduct detailed survey regarding availability of the particular service for all locations. Bidders may do Site Survey for availability of communication media prior to submission of bids.

The bidder may design appropriate architecture for providing end to end metering solution. He is free to decide upon the best solution out of all the available options to ensure that data from all IEMs in ASSAM are available at State Load Despatch Centre by the scheduled time. However, the entire responsibility of fully functional end to end metering system shall rest with the bidder in order to meet the performance levels as given in this document. The communication provider may adopt Optical Fibre/GSM/3G/4G communication technology or a combination of these technologies as per the site requirement adopting best available technology in the proposed area of implementation. The successful bidder shall be responsible for proper data exchange among IEM, DCU, CDCS, MDP and other operational/requisite software as part of fully functional metering system.

The bidder shall design a reliable, interference free & robust communication network keeping in view the site conditions. It shall be flexible in terms of providing communication in variable terrain & urban density. The bidder shall design the network architecture keeping in view the existing and planned infrastructure of the utility. During designing, suitable consideration shall be kept for future expansion as per requirement of Utility. Before designing the communication network, the bidder shall do the site survey and would provide the most efficient communication infrastructure. The entire infrastructure & associated civil works required for installation & commissioning of equipment/devices like DCUs, repeaters, routers & access points etc. shall be in the scope of bidder. The operational testing of all the network elements has to be demonstrated by the bidder to the satisfaction of the utility.

- d) The Bidder shall provide the necessary software which would enable a local PC/ CDCS to:

- i. Accept the data from the Optical/Ethernet/WAN and store it in its memory in user defined formats (text, csv, xls, etc.) in a user-defined file name (file name format must be ddmmyy substation name-utility name).
 - ii. Polling feature along with a task scheduler to run the data downloading software at a pre-designated date and time repeatedly or by manually selecting a meter. File naming for such downloaded data should also be in user-defined format. A detailed activity log shall also be available for each downloading operation.
 - iii. Upload/Import meter data (binary files) in the software for further processing. While uploading, there shall be provision to upload all selected files with single key-stroke.
 - iv. Convert the binary file(s) to text file(s). There should be provision to select multiple files based on filename, convert all selected files with single key-stroke and store the text files in the same location where binary files are stored.
 - v. Display the collected data on PC's screen in text format, with forward/backward rolling
 - vi. Print out in text format the data collected from one or more meters, starting from a certain date and time, as per operator's instructions
 - vii. Transmit the collected data, in binary format, through an appropriate communication link to the central computer, starting from a certain date and time, as per operator's instructions.
 - viii. Store the collected data in binary format, on a CD/Pen Drive. In addition to above, in general the software shall be able to convert IEMs data to existing format as well as in tabular (.csv) format as applicable.
- e) The above software shall further ensure that absolutely no tampering (except erasing of complete data with password protection) of the collected metering data is possible during its handling by the PC. The software shall be suitable for the commonly available PCs, (Windows) and shall be supplied to Owner in a compatible form to enable its easy loading into the PCs available (or to be installed by the Owner/others) at the various substations.
- f) The bidder shall ensure data integrity checks on all metered data received from data collection systems.
- g) The quality of installation of the various equipment & power supply wiring to all field equipment shall be as per standards/ regulations/prevaling practices of the utility. The supply of electricity needed for operation and maintenance of entire Metering system shall be provided free of cost by the respective owners of the premises.

7. Quality Assurance

The quality control procedure to be adopted during manufacturing of the specified equipment shall be mutually discussed and finalized in due course, generally based on the established and proven practices of the manufacturer. The software shall be user friendly which can be easily installed in any PC/Laptop irrespective of operating system of the PC/Laptop, and shall be certified for ensuring data handling capabilities. The same shall be demonstrated by the party during technical evaluation. During demonstration party shall bring standard meter. Thereafter software shall be offered for technical compatibility before taking up further necessary action in the procurement process.

8. Testing

- a) All equipment, after final assembly and before dispatch from manufacturer's works, shall be duly tested to verify that is suitable for supply to the Owner. Routine and acceptance tests shall be carried out on the meters in line with IS 14697.
- b) Any meter which fails to fully comply with the specification requirements shall be liable to be rejected by the Owner. However, the Owner may purchase such meters at a reduced price in case of marginal non-compliance, at his sole discretion.
- c) Acceptance Tests for PC Software and data down loading using meter communication ports- All IEMs after final assembly and before dspatch from Bidder's/Manufacturer's works shall be duly tested to verify that they are suitable for downloading data using meter communication ports shall be subjected to the following acceptance test.
 - i. Downloading Meter Data from the Meter(s) to PC via optical port.
 - ii. Downloading meter data through USB port and RS 232.
 - iii. Downloading meter data to DCU/CDCS through Ethernet as well as RS 485 port.
 - iv. Compatibility with PC Software.
 - v. Functioning of Time synchronization, advance and retard time commands.
 - vi. Per meter downloading time verification.
- d) Copy of Certificate shall be submitted to SLDC

Type Tests

- a) One (1) meter in a batch shall be subjected to the complete range of type tests as per IS14697 and IS15959, after final assembly. In case of any failure to pass all specified tests, the bidder shall arrange to carry out the requisite modifications/replacements in the entire lot of meters at his own cost. After any such modifications and final assembly, two (2) meters selected out of the lot by the Owner's representative shall be subjected to the full range of type tests. The lot shall be accepted by the Owner only after successful type testing.
- b) The meters used for type testing shall be separately identified, duly marked, and supplied to the Owner in case they are fully functional and as good as other (new) meters, after necessary touching up/refurbishing. In case this is not possible, the bidder shall provide their replacements at no extra cost to Owner.
- c) The Bidder shall arrange all type testing specified above, and bear all expenses for the same.
- d) Copy of Test certificate shall be submitted to SLDC.
- e) Type test certificates completed in all respect from NABL approved test house shall be submitted along with the offer

9. ANOMALY DETECTION FEATURES

The meter shall have features to detect and log the occurrence and restoration of following anomalies, along with date and time of event: 6.1.1. Phase wise Missing Potential – The meter shall detect missing potential (1 or 2

phases) provided the line current is above a specified threshold. The voltage at that stage would be below a specified threshold.

- Phase wise Current Circuit Reversal – The meter shall detect reversal of polarity provided the current terminals are reversed. This shall be recorded for 1 or 2 phase CT reversal.
- Voltage Unbalance – The meter shall detect voltage unbalance if there is unbalance in voltages.
- Current Unbalance – The meter shall detect current unbalance if there is unbalance in load conditions. Meter should ensure true system conditions before going for current unbalance checks.
- CT Miss – The meter shall detect current miss if the current is below a defined threshold, provided the phase voltage is above a specified threshold. Snapshots of phase wise voltage, phase wise active current and phase wise power factor shall be provided with above specified anomaly events. Further, each meter module shall record the following events along with total duration:
 - Power On/Off – The meter shall detect power off if both the auxiliary supplies fail. The event shall be recorded on the next power up. At the same time power on event shall be recorded. No snapshot shall be logged with this event.
 - Feeder Supply Fail -This event shall be logged when feeder supply, i.e., all the voltages go below certain threshold. No snapshot shall be logged with this event.
- Last three hundred & fifty (350) events (occurrence + restoration), in total, shall be stored in the meter memory on first in first out basis.
- There shall be five separate compartments for logging of different type of anomalies:

Compartment No. 1	100 events of missing potential
Compartment No. 2	100 events of CT reversal
Compartment No. 3	100 events of power failure/ Power on-off
Compartment No. 4	50 events of transaction related changes as per ICS Category B

Once one or more compartments have become full, the last anomaly event pertaining to the same compartment shall be entered and the earliest (first one) anomaly event should disappear. Thus, in this manner each succeeding anomaly event shall replace the earliest recorded event, compartment wise. Events of one compartment/ category should overwrite the events of their own compartment/ category only. In general persistence time of 5 min. for occurrence and restoration respectively need to be supported in meter.

Anomaly count should increase as per occurrence (not restoration) of anomaly events. Total no. of counts shall be provided on BCS.