
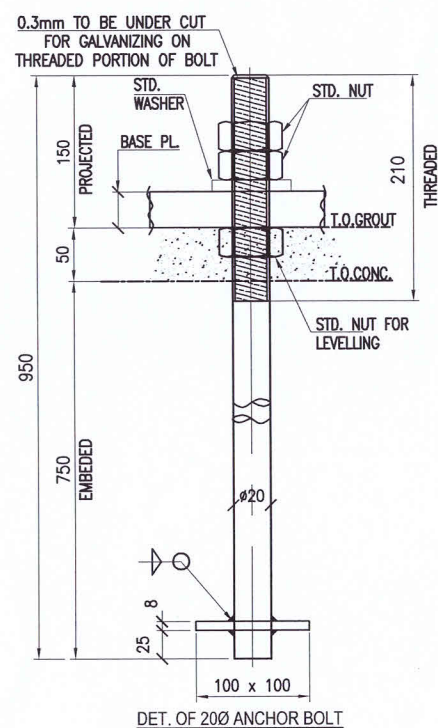
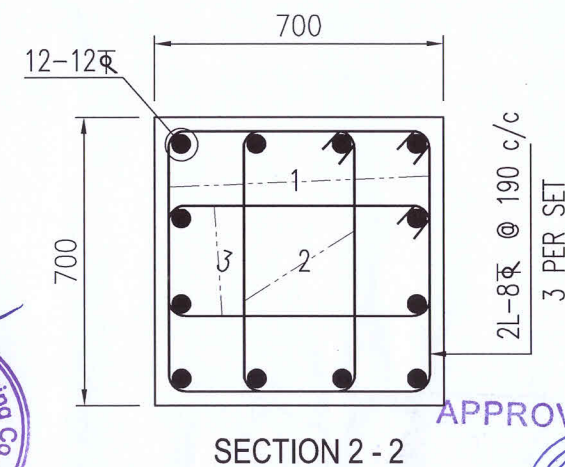
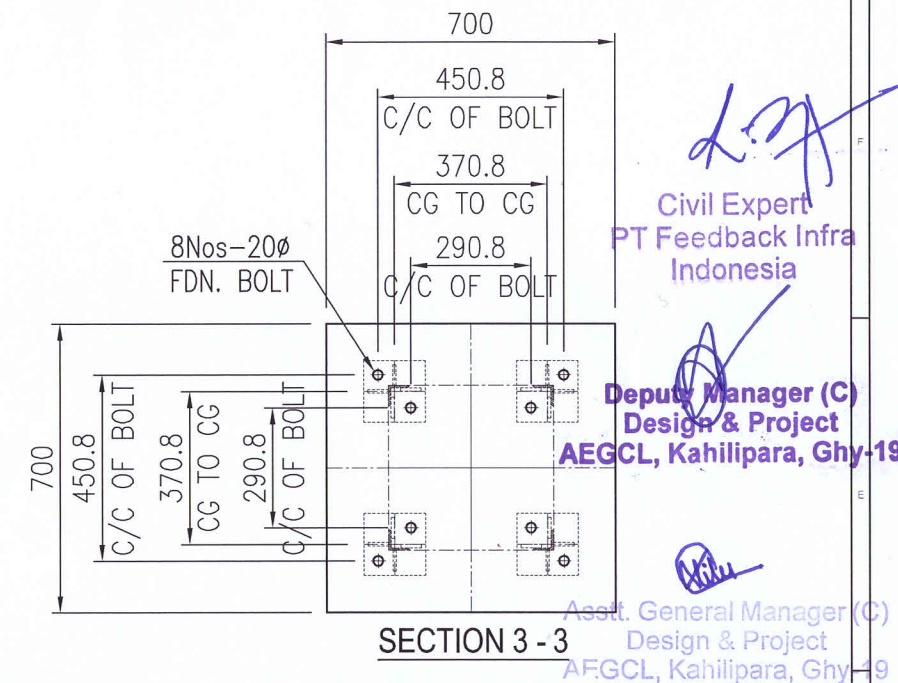
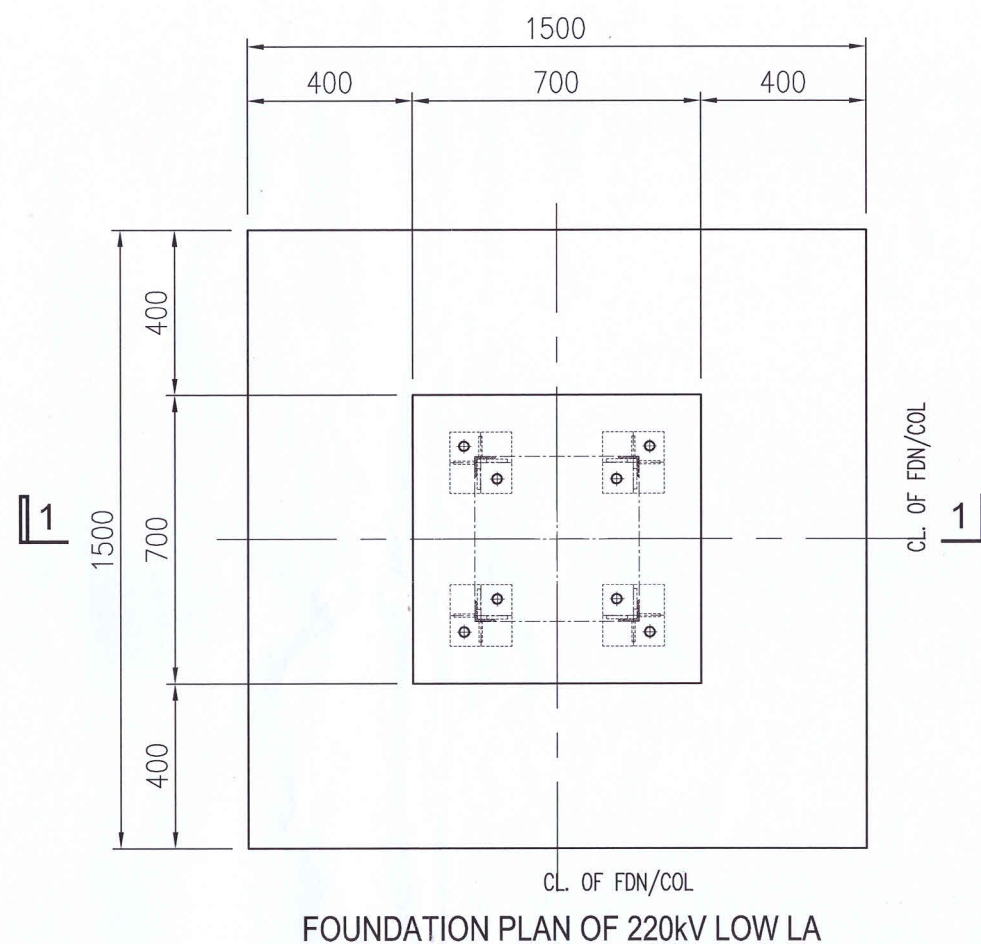


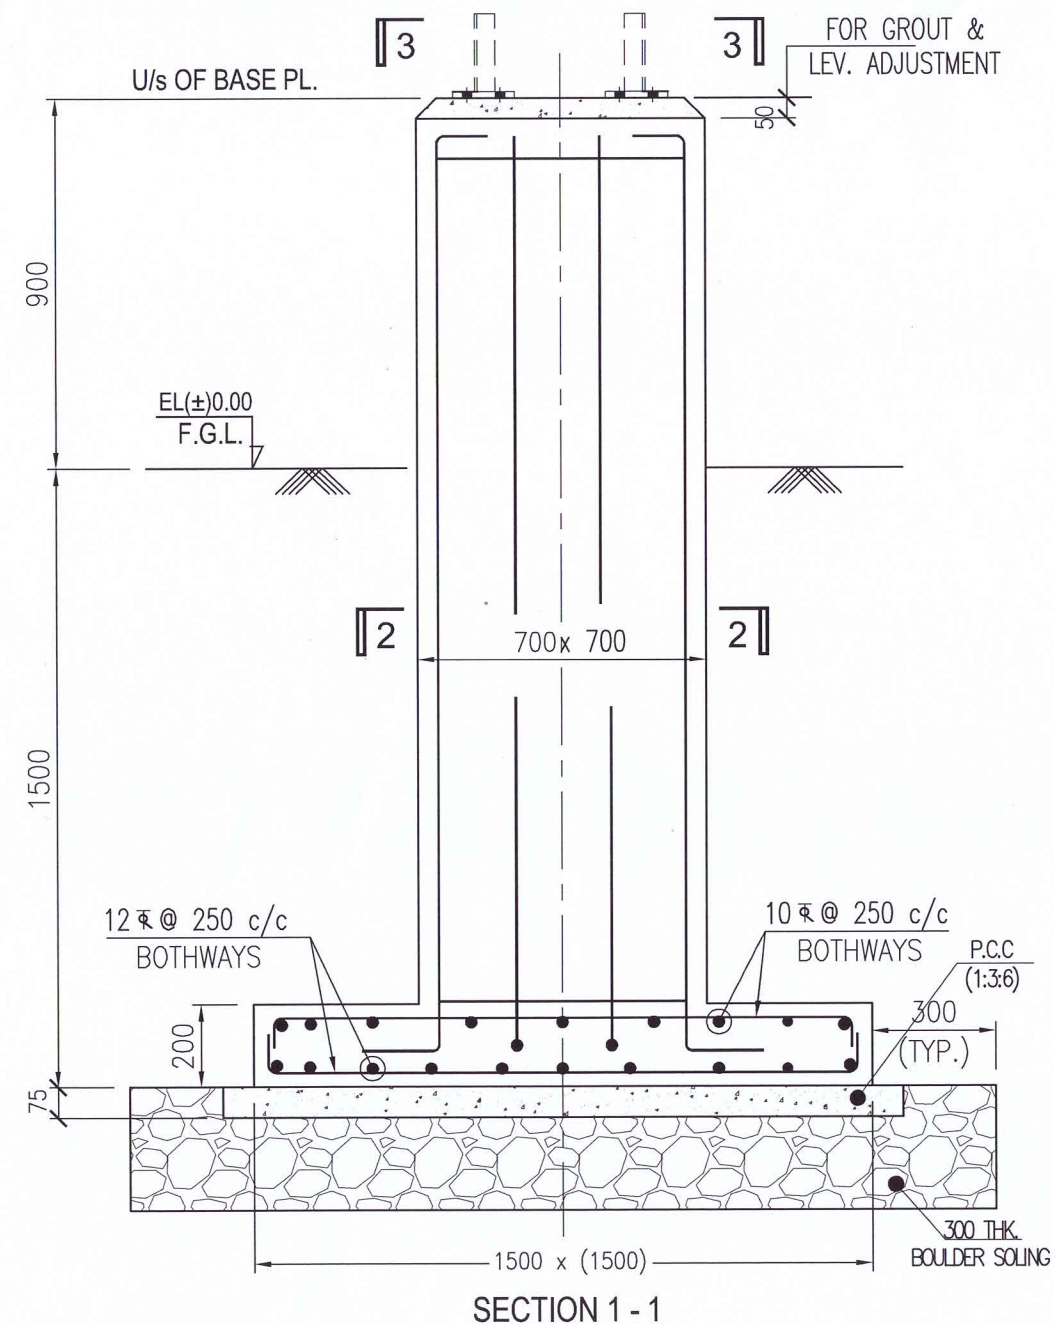



REFERENCE DRAWING:

DRG. NO. - AEGCL-SONA-0816SN-CIV-2LASFAB-126
SONAPUR SS - 220KV LA (LOW LEVEL) - FABRICATION DRAWING & BILL OF MATERIAL OF SUPPORT STRUCTURE


NOTES:-

- ALL DIMENSIONS ARE IN mm & LEVELS ARE IN M, UNLESS NOTED OTHERWISE.
- F.G.L (±)00 CORRESPONDS TO RL. 100.1 M.
- a). BINDING CONCRETE MIX PROPORTION (1:3:6).
b). R.C.C. WORK MIX PROPORTION (M-20)
- CLEAR COVER TO MAIN RE-INFORCEMENTS:-
a) FOOTING - TOP, BOTTOM & SIDE - 50 mm. b) COLUMN - 40 mm.,
- ϕ DENOTES HIGH YIELD STRENGTH DEFORMED TMT BARS OF CHARACTERISTICS STRENGTH Fe - 500D N/mm².
- MINIMUM ANCHORAGE LENGTH OF BARS SHALL BE 50 x DIA OF BARS.
- BARS TO BE LOCALLY ADJUSTED TO AVOID CUT OUTS, POCKETS, INSERTS ETC.
- LAP LENGTH = 50 x DIA OF BARS IN STAGGERED POSITIONS.
- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH TECHNICAL SPECIFICATIONS.
- SAFE BEARING CAPACITY OF SOIL IS 6 t/sqm. AT 1.5m BELOW F.G.L.


0	FIRST SUBMISSION	S.R	D.S	S.C	28.11.2025
REV	DESCRIPTION	PREP.	CHKD.	APPD.	DATE
			SIGN.		
OWNER	ASSAM ELECTRICITY GRID CORPORATION LIMITED				
EPC	TECHNO ELECTRIC & ENGINEERING COMPANY LIMITED				
NOA :	AEGCL/MD/AIIB/400kv/Sonapur/TENDER/PkgH/2023-24/EXTN-2/71 Dtd: 13.09.2024				
PROJECT :	CONSTRUCTION OF 400/220kv, GIS AT SONAPUR AND ASSOCIATED TRANSMISSION LINES AND BAY EXTENSION WORKS AT EXISTING 220kv SONAPUR GIS.				
SUBSTATION :	400/220kv GAS INSULATED SUBSTATION AT SONAPUR				
DRG. TITLE	SONAPUR SS - 220KV LOW LA - FOUNDATION DRAWING				
DRG. NO. :	AEGCL-SONA-0816SN-CIV-2LASFDNDWG-134				
SCALE :	N.T.S	JOB NO:	0816SN	SHEET	2 OF 2

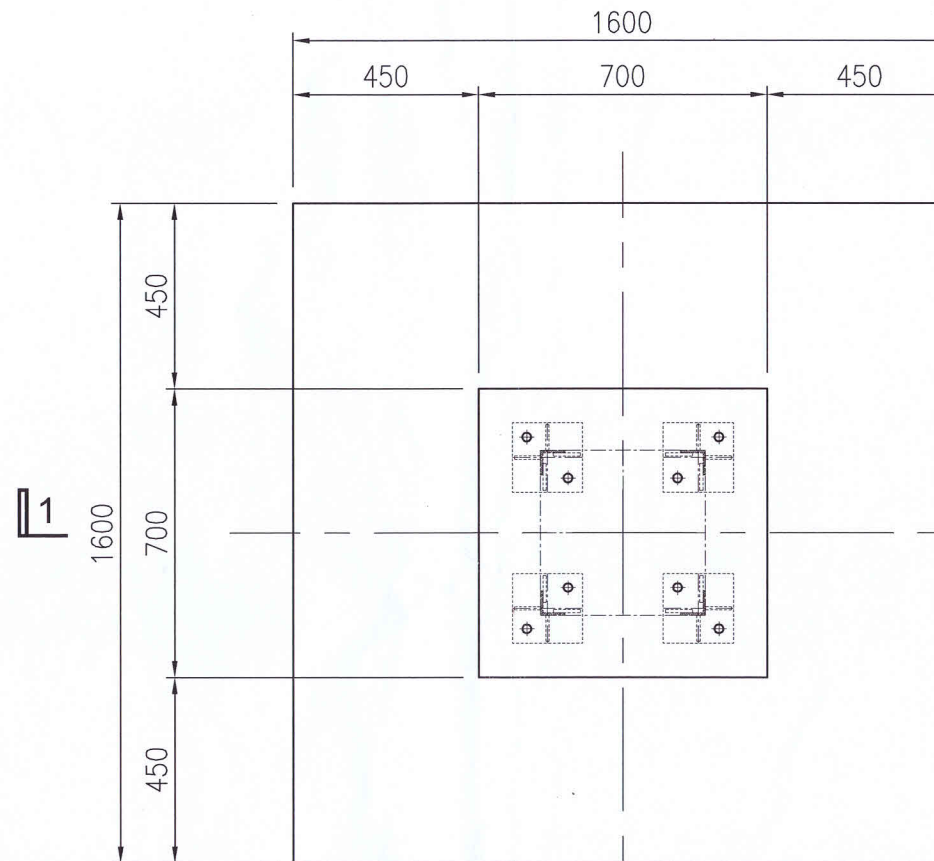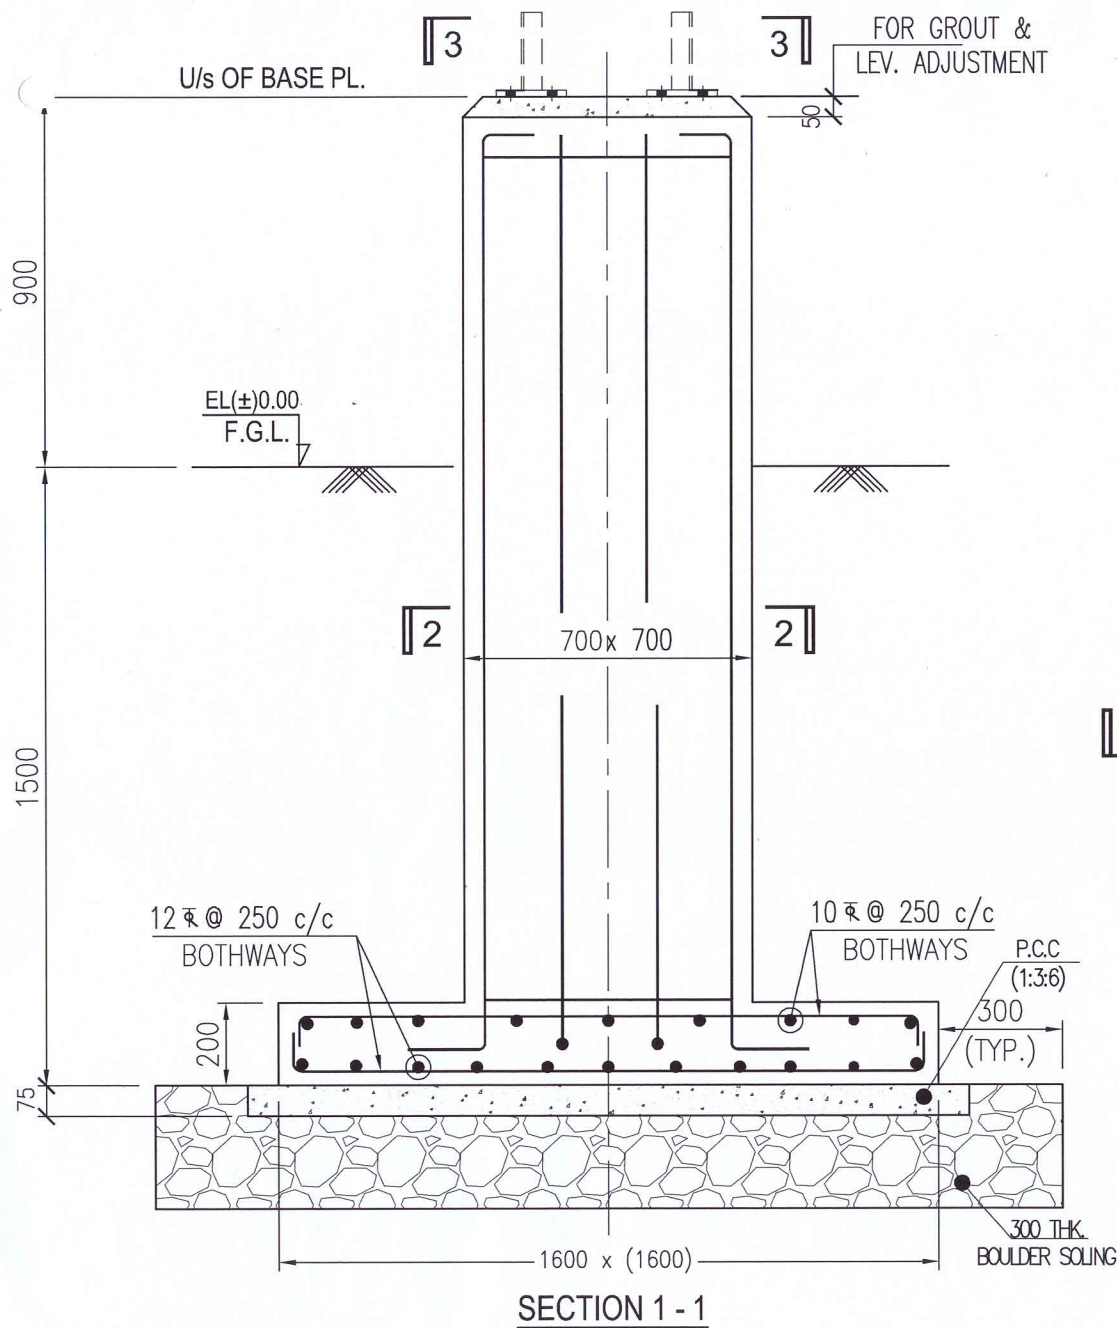


CL. OF FDN/COL
FOUNDATION PLAN OF 220KV HIGH LA

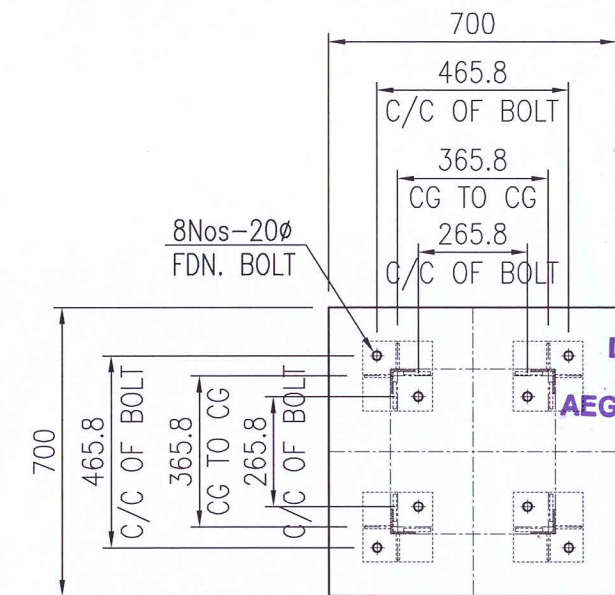

SECTION 3-3

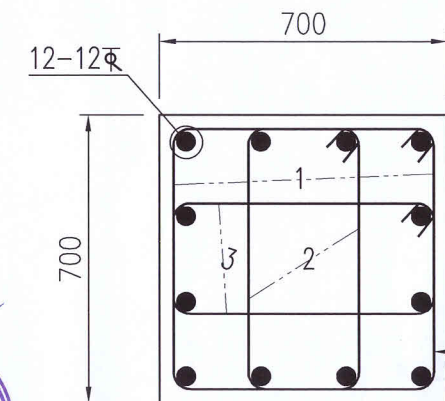

SECTION 2-2

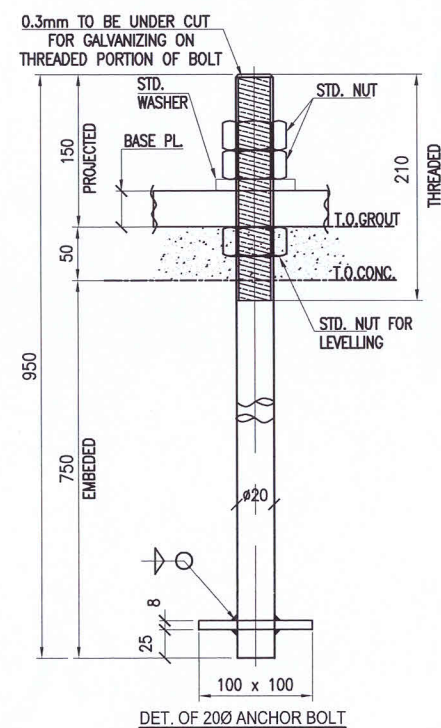

REFERENCE DRAWING:

DRG. NO. - AEGCL-SONA-0816SN-CIV-2LASFAB-126
SONAPUR SS - SONAPUR SS - 220KV LA (HIGH LEVEL) - FABRICATION DRAWING & BILL OF MATERIAL OF SUPPORT STRUCTURE.

NOTES:-

- ALL DIMENSIONS ARE IN mm & LEVELS ARE IN M, UNLESS NOTED OTHERWISE.
- F.G.L (±)00 CORRESPONDS TO RL. 100.1 M.
- a). BINDING CONCRETE MIX PROPORTION (1:3:6).
b). R.C.C. WORK MIX PROPORTION (M-20)
- CLEAR COVER TO MAIN RE-INFORCEMENTS:-
a) FOOTING - TOP, BOTTOM & SIDE - 50 mm. b) COLUMN - 40 mm.,
- Ø DENOTES HIGH YIELD STRENGTH DEFORMED TMT BARS OF CHARACTERISTICS STRENGTH Fe - 500D N/mm².
- MINIMUM ANCHORAGE LENGTH OF BARS SHALL BE 50 x DIA OF BARS.
- BARS TO BE LOCALLY ADJUSTED TO AVOID CUT OUTS, POCKETS, INSERTS ETC.
- LAP LENGTH = 50 x DIA OF BARS IN STAGGERED POSITIONS.
- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH TECHNICAL SPECIFICATIONS.
- SAFE BEARING CAPACITY OF SOIL IS 6 t/sqm. AT 1.5m BELOW F.G.L.

This drawing is specifically for
Old sonapur CKT-I & CKT-II



Civil Expert
PT Feedback Infra
Indonesia

Deputy Manager (C)
Design & Project
AEGCL, Kahilipara, Ghy-19

Asstt. General Manager (C)
Design & Project
AEGCL, Kahilipara, Ghy-19

APPROVED BY

General Manager (C)
O/o the M.D, AEGCL, Bijulee Bhawan
Paltanbazar, Guwahati-1

REV	DESCRIPTION	PREP.	CHKD.	APPD.	DATE
0	FIRST SUBMISSION	S.R	D.S	S.C	28.11.2025
OWNER		ASSAM ELECTRICITY GRID CORPORATION LIMITED			
EPC		TECHNO ELECTRIC & ENGINEERING COMPANY LIMITED			
NOA :		AEGCL/MD/AIB/400KV/SONAPUR/TENDER/PkGH/2023-24/EXTN-2/71 DTD: 13.09.2024			
PROJECT :		CONSTRUCTION OF 400/220KV, GIS AT SONAPUR AND ASSOCIATED TRANSMISSION LINES AND BAY EXTENSION WORKS AT EXISTING 220KV SONAPUR GIS.			
SUBSTATION :		400/220KV GAS INSULATED SUBSTATION AT SONAPUR			
DRG. TITLE		SONAPUR SS - 220KV HIGH LA - FOUNDATION DRAWING			
DRG. NO. :		AEGCL-SONA-0816SN-CIV-2LASFDNDWG-134			
SCALE :		N.T.S	JOB NO:	0816SN	SHEET 1 OF 2