



LEGENDS:-

— 40mm DIA, MS ROD

- - - 75X12mm GS FLAT

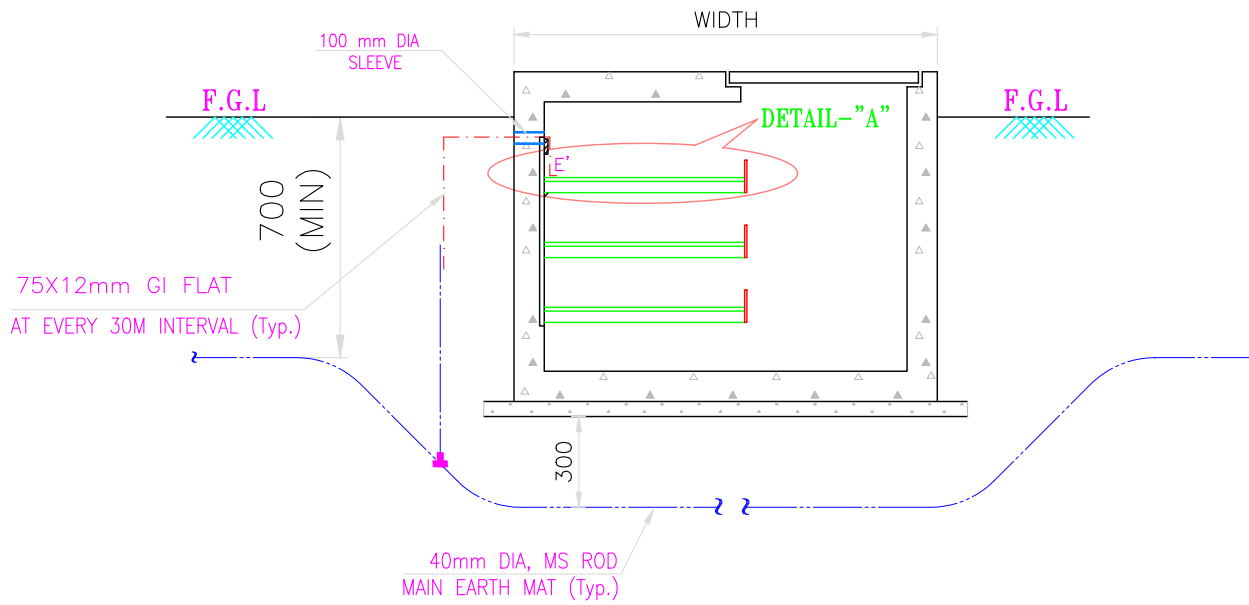

TYPICAL CROSS SECTION OF CABLE TRENCH EARTHING

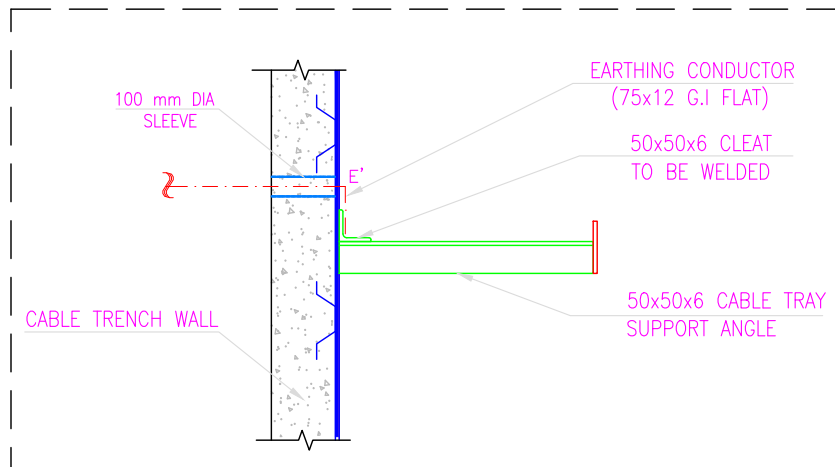

DETAIL - A

NOTES:-

1. M.S FLAT SHALL BE RUN ON TOP TIER OF ALONG WITH THE ALL CABLE TRENCHES & WELDED TO EACH OF THE RACKS.
2. M.S FLAT SHALL BE EARTHED AT EVERY 30M INTERVALS & ALSO AT BOTH ENDS.