




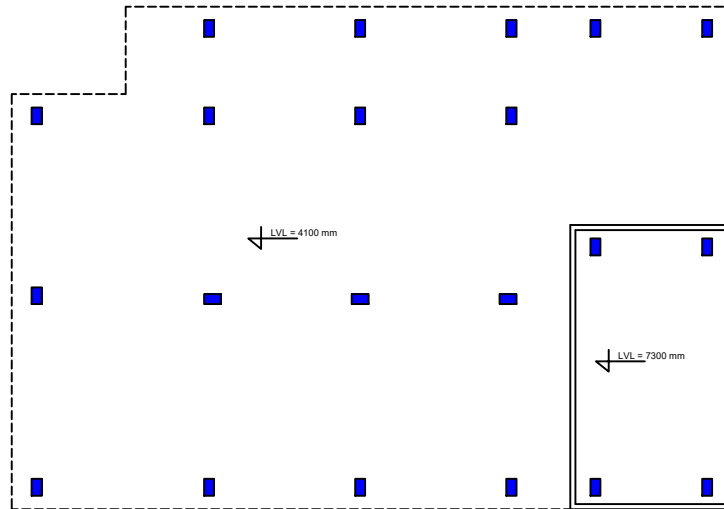


MUMTY FLOOR PLAN

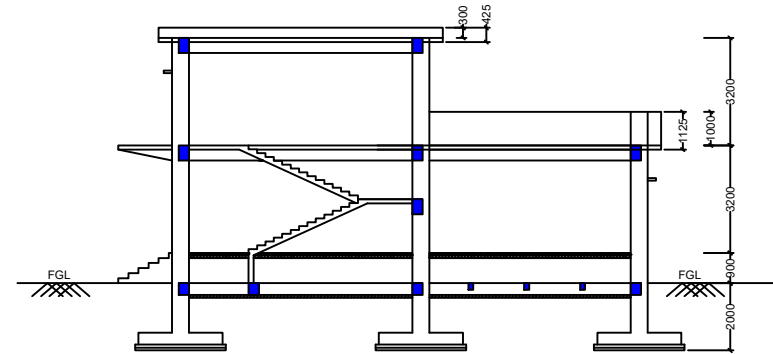

SECTION

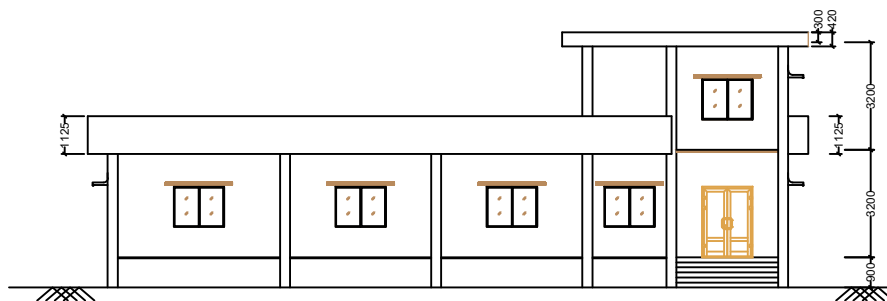


FRONT ELEVATION

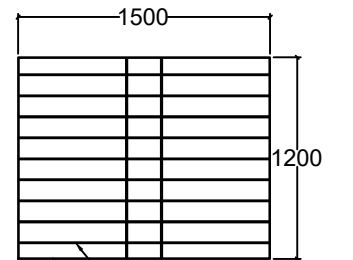

8x8 mm square MS bar
20x5 mm SM Strip

Window Grill



NOTES :-

- 1) ALL DIMENSIONS ARE IN MM & LEVELS
- 2) CLEAR COVER TO MAIN REINFORCEMENT SHALL BE AS FOLLOWS:
 - a) FOOTING=50MM,
 - b) COLUMN =40MM,
BEAM =25MM, SLAB =20MM.
- 3) REINFORCEMENT SHALL BE FE500D CONFIRMING TO IS 1786.
- 4) UNLESS OTHERWISE STATED ALL CONCRETE FOR RCC. WORK SHALL BE M-20 GRADE TO GIVE STRENGTH OF 20N/MM² AT 28 DAYS.
- 5) MIN. LAP LENGTH = 50 X DIA.
- 6) CENTER TO CENTER DISTANCE BETWEEN LAPS SHALL BE 1.3 X LAP LENGTH.

LEGENDS :-

- 1) P.C.C - PLAIN CEMENT CONCRETE
- 2) F.F.L - FINISHED FLOOR LEVEL
- 3) T.O.C - TOP OF CONCRETE
- 4) EL - ELEVATION
- 5) F.G.L - FINISHED GROUND LEVEL
- 6) THK - THICKNESS

PROJECT - Construction of AGM Office at 132/33 kV
Panchgram Sub-Station, AEGCL, Hailakandi, Assam.

TITLE - MUMTY PLAN, ELEVATION AND SECTION
