



ASSAM ELECTRICITY GRID CORPORATION LIMITED

Circle Office: O/o the Deputy General Manager, Dibrugarh T&T Circle,
Niz Kadamoni, Dibrugarh-786001, Assam, Email: dgmtdc.dibrugarh@aeqcl.co.in

No. AEGCL/DGM/TTC/DBR/T-02/2026/4723

Date:25/06/2026

SHORT QUOTATION NOTICE

For and on behalf of the Managing Director, Assam Electricity Grid Corporation Limited (AEGCL), the Deputy General Manager, T&T Circle, AEGCL, Dibrugarh, invites Short Quotation Notice from interested empanelled contractors for civil works under AEGCL for the work as mentioned below.

A) Basic Details:

Details/Name of work	Repairing & maintenance of departmental quarters Type VI, quarter no. 32 of residential colony at 132KV Dibrugarh GSS, AEGCL,
Work type	Civil Work
Quotation Inviting Authority	Deputy General Manager (T&T Circle, AEGCL Dibrugarh)
Designation & Address	The DGM, T&T Circle, AEGCL Dibrugarh
Total value	Rs. 2,49,374.00 (Rupees Two Lakh Forty Nine Thousand Three Hundred and Seventy Four) only.
Tender Fee	Rs.500.00 (Rupees Five Hundred) only (Non-Refundable) (to be submitted in the form of Demand Draft in favour of the Managing Director, AEGCL, Bijulee-Bhawan, Paltan Bazar, Guwahati-1).

B) Critical Dates:

Start Date	26/06/2026	12Hrs:00Mins
Submission Start Date	26/06/2026	12Hrs:00Mins
End Date	13/07/2026	12Hrs:00Mins
Opening Date	14/07/2026	12Hrs:00Mins

C) General Terms and Conditions:

Bidders should submit the following documents along with the quotation/price bid:-

- The scope of work is as specified in the BOQ and as per instruction of the Site Engineer. All works required for site preparation will have to be carried out by the contractor at his own expense, whenever directed by the site In-charge.
- The total estimated value of the work is **Rs. 2,49,374.00 (Rupees Two Lakh Forty Nine Thousand Three Hundred and Seventy Four) only** which is inclusive of all taxes and the BOQ is as appended herewith. Rates should be quoted against each item as specified in the BOQ.
- The interested quotationers must compulsorily pay the Bid Security of Rs. 5,000.00(Rupees Five Thousand) only in the form of Demand Draft in favour of the Managing Director, AEGCL, Bijulee-Bhawan, Paltan Bazar, Guwahati-1, payable at Guwahati. The original copy of the bid security must be submitted along with relevant documents.
- Fund: O&M, HQ, UAR for FY 2026-27.
- Time of completion :- 90(ninety) days from the date of site handover.
- Bidders must submit the following document along with the price quotation
 - Copy of agreement for empanelment under any Circle in AEGCL.
- Payment will be made as per actual measurement of work and will be released subject to availability of fund.
- No advance/Mobilization advance and running bill shall be made for this work. First and final bill shall be released only after final acceptance by AEGCL.
- 10% of the total billed amount will be retained from the bill as Performance Guarantee (Security Deposit) and the amount will be released on successful completion of warranty period of 12 (Twelve) months. Liquidated Damages @ 1% (One Percent) of the amount will be deducted per week subject to a maximum of 10% of the work value if the time taken to complete the work exceeds the allotted completion time. In case

OFFICE OF THE MANAGING DIRECTOR

Regd. Office:(FIRST FLOOR), BIJULEE BHAWAN, PALTANBAZAR, GUWAHATI - 781001

CIN: U40101AS2003SGC007238 GSTIN: 18AAFCA4973J9Z3 PHONE: 0361-2739520 Web: www.aegcl.co.in



ASSAM ELECTRICITY GRID CORPORATION LIMITED

Circle Office: O/o the Deputy General Manager, Dibrugarh T&T Circle,
Niz Kadamoni, Dibrugarh-786001, Assam, Email: dgmttc.dibrugarh@aegcl.co.in

an abnormally low bid (ALB) is accepted, then an additional performance security as per the assessment of the tender evaluation committee and not exceeding 20% of the contract value shall be submitted by the successful bidder.

- x. Other terms and condition: All other terms and conditions unless specifically mentioned herein is subjected to the “*General conditions of supply and erection of ASEB, 2009*” & AEGCL's prevailing norms.

D) BOQ:

<u>Annexure-1</u>					
SI No.	Item Description	Unit	Quantity	Rate	Amount
1.	Cement concrete flooring 1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate) finished with a floating coat of neat cement, including cement slurry, but excluding the cost of nosing of steps etc. complete 40 mm thick with 20 mm nominal size stone aggregate	sqm	36.00		
2.	Providing and fixing factory made panel PVC door shutter consisting of frame made out of M.S. tubes of 19 gauge thickness and size of 19 mm x 19 mm for styles and 15x15 mm for top & bottom rails. M.S. frame shall have a coat of steel primers of approved make and manufacture. M.S. frame covered with 5 mm thick heat moulded PVC 'C' channel of size 30 mm thickness, 70 mm width out of which 50 mm shall be flat and 20 mm shall be tapered in 45 degree angle on both side forming styles and 5 mm thick, 95 mm wide PVC sheet out of which 75 mm shall be flat and 20 mm shall be tapered in 45 degree on the inner side to form top and bottom rail and 115 mm wide PVC sheet out of which 75 mm shall be flat and 20 mm shall be tapered on both sides to form lock rail. Top, bottom and lock rails shall be provided both side of the panel. 10 mm (5 mm x 2) thick, 20 mm wide cross PVC sheet be provided as gap insert for top rail & bottom rail, paneling of 5 mm thick both side PVC sheet to be fitted in the M.S. frame welded/ sealed to the styles & rails with 7 mm (5 mm + 2 mm) thick x 15 mm wide PVC sheet beading on inner side, and joined together with solvent cement adhesive. An additional 5 mm thick	sqm	3.78		

OFFICE OF THE MANAGING DIRECTOR

Regd. Office: (FIRST FLOOR), BIJULEE BHAWAN, PALTANBAZAR, GUWAHATI - 781001

CIN: U40101AS2003SGC007238 GSTIN: 18AAFCA4973J9Z3 PHONE: 0361-2739520 Web: www.aegcl.co.in



ASSAM ELECTRICITY GRID CORPORATION LIMITED

Circle Office: O/o the Deputy General Manager, Dibrugarh T&T Circle,
Niz Kadamoni, Dibrugarh-786001, Assam, Email: dgmtdc.dibrugarh@aecl.co.in

	PVC strip of 20 mm width is to be stuck on the interior side of the 'C' Channel using PVC solvent adhesive etc. complete as per direction of Engineer-in-charge, manufacturer's specification & drawing. 30 mm thick plain PVC door shutters				
3.	Providing and fixing M.S. Tubular frames for doors, windows, ventilators and cupboard with rectangular/ L-Type sections, made of 1.60 mm thick M.S. Sheet, joints mitred, welded and grinded finish, with profiles of required size, including fixing of necessary butt hinges and screws and applying a priming coat of approved steel primer. Fixing with 15x3 mm lugs 10 cm long embedded in cement concrete block 15x10x10 cm of C.C. 1:3:6 (1 Cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	kg	78.00		
4.	Providing and fixing 35 mm thick factory made laminated veneer lumber door shutter conforming to IS : 14616 and TADS 15:2001 (Part B), fixing with butt hinges of required size with necessary screws, all complete as per directions of Engineer-in-charge and panelling with panels of : (Note:- Butt hinges and necessary screws shall be paid separately) 12 mm thick one side Pre-laminated particle board (decorative lamination on one side and other sides balancing lamination) grade -1, medium density flat pressed, three layer particle board FPT - I or graded wood particle board FPT-1 conforming to IS : 3087 bonded with BWP type synthetic resin adhesive as per IS : 848 and pre-laminated conforming to IS : 12823, Grade -1, Type II marked :	sqm	10.5		
5.	Providing wood work in frames of false ceiling, partitions etc. sawn and fixed in position with necessary stainless steel screws etc. Kiln seasoned and chemically treated hollock wood	cum	0.39		
6.	Providing and fixing insulating board ceiling of approved quality with necessary nails etc. complete (frame	sqm	39.20		

OFFICE OF THE MANAGING DIRECTOR

Regd. Office: (FIRST FLOOR), BIJULEE BHAWAN, PALTANBAZAR; GUWAHATI - 781001

CIN: U40101AS2003SGC007238 GSTIN: 18AAFCA4973J9Z3 PHONE: 0361-2739520 Web: www.aegcl.co.in



ASSAM ELECTRICITY GRID CORPORATION LIMITED

Circle Office: O/o the Deputy General Manager, Dibrugarh T&T Circle,
Niz Kadamoni, Dibrugarh-786001, Assam, Email: dgmtdc.dibrugarh@aegcl.co.in

	work to be paid separately) : White face insulating board 12 mm thick				
7.	Distempering with 1st quality acrylic distemper, having VOC (Volatile Organic Compound) content less than 50 grams/ litre, of approved brand and manufacture, including applying additional coats wherever required, to achieve even shade and colour. Two coats	sqm	197.32		
8.	Wall painting with acrylic emulsion paint, having VOC (Volatile Organic Compound) content less than 50 grams/ litre, of approved brand and manufacture, including applying additional coats wherever required, to achieve even shade and colour. Two coats	sqm	197.32		
9.	Dismantling roofing including ridges, hips, valleys and gutters etc., and stacking the material within 50 metres lead of: G.S. Sheet	sqm	39.8		
10.	Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia & length (hold fast lugs or dash fastener shall be paid for separately). Kiln seasoned and chemically treated hollock wood	cum	0.19		
11.	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in: Cement mortar 1:4 (1 cement : 4 coarse sand)	cum	0.23		
12.	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering -All work upto plinth level : 4.1.5 1:3:6 (1 Cement : 3 coarse sand (zone-III) derived from natural sources : 6 graded stone aggregate 20 mm nominal size derived from natural sources)	cum	0.23		

OFFICE OF THE MANAGING DIRECTOR

Regd. Office:(FIRST FLOOR), BIJULEE BHAWAN, PALTANBAZAR; GUWAHATI - 781001

CIN: U40101AS2003SGC007238 GSTIN: 18AAFCA4973J9Z3 PHONE: 0361-2739520 Web: www.aegcl.co.in



ASSAM ELECTRICITY GRID CORPORATION LIMITED

Circle Office: O/o the Deputy General Manager, Dibrugarh T&T Circle,
Niz Kadamoni, Dibrugarh-786001, Assam, Email: dgmtdc.dibrugarh@aeccl.co.in

13.	Providing precast R.C.C slab over drain ,septic tank etc. in prop. 1:2:4 reinforced with 10mm M.S. bar @ 150mm centre both ways tying with 20 gauge black annealed wire with necessary shuttering , curing etc. complete including fixing in position as directed. 75mm thick slab	sqm	1.05		
14.	Clearance of service septic tank and removing the night soil and debris etc. manually from the tank/chamber to a distant place preferably during holidays or at night by bailing out the deposited night soil, buring the same in near by trenches/pits which has been dug earlier and covering the same. The service septic tank is cleaned with clear water and completed as directed by the Department.	each	1		
15.	Cleaning & clearing the inspection chamber which is partly filled with night soil connected to septic tank soak pit with both side soil pipe of length 1.80m manually and disposed off the block by pushing with bamboo kamis as directed by the Department.	each	1		
16.	Unskilled labour	mandays	10		
17.	Providing corrugated galvenised Iron sheet roofing of TATA SHAKTEE / SAIL including fitting and fixing necessary galvenised J or L hooks, bolts and nuts 8 mm dia with bitumen washer 25 mm dia x 3 mm thick and 1.6 mm thick limpet washer complete excluding cost of roof truss, purlin etc. (Roof trusses and purlin etc.to be measured and paid separately). 0.50 mm thick	sqm	39.8		
18.	Providing barge board of size 200mm x 20mm with 1st class local Hollock/ Bonsum timber including fitting and fixing with necessary wood screws etc. complete.	rm	12.00		
Grand total(Inclusive of GST)=					

OFFICE OF THE MANAGING DIRECTOR

Regd. Office:(FIRST FLOOR), BIJULEE BHAWAN, PALTANBAZAR; GUWAHATI - 781001

CIN: U40101AS2003SGC007238 GSTIN: 18AAFCA4973J9Z3 PHONE: 0361-2739520 Web: www.aegcl.co.in

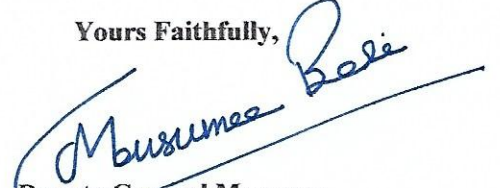


ASSAM ELECTRICITY GRID CORPORATION LIMITED

Circle Office: O/o the Deputy General Manager, Dibrugarh T&T Circle,
Niz Kadamoni, Dibrugarh-786001, Assam, Email: dgmttc.dibrugarh@aegcl.co.in

The undersigned does not bind oneself to accept the lowest rate and deserves the right to accept or reject any or all quotations without assigning any reason. The decision of the AEGCL will be final in this regard.

Yours Faithfully,


Deputy General Manager,
T&T Circle, AEGCL
Dibrugarh.

Memo no: No. AEGCL/DGM/TTC/DBR/T-02/2026/ 4723(a-g)

Date: 25-06-2026

Copy to:

1. PS to the MD, AEGCL, Bijulee Bhawan, Paltan Bazar, Ghy-01 for kind appraisal to the MD, AEGCL.
2. The Chief General Manager(O&M) UAR, AEGCL, Bijulee Bhawan, Paltan Bazar, Ghy-01 for favour of her kind information.
3. The General Manager, UA T&T Zone, AEGCL, Dibrugarh-01 for kind information.
4. The Assistant General Manager, 132KV GSS, AEGCL, Dibrugarh for information.
5. The AGM (IT), AEGCL, Bijulee Bhawan, Paltan Bazar, Ghy-01 for information & necessary publication in AEGCL's website.
6. Office Notice Board
7. Relevant file.


Deputy General Manager

OFFICE OF THE MANAGING DIRECTOR

Regd. Office:(FIRST FLOOR), BIJULEE BHAWAN, PALTANBAZAR; GUWAHATI - 781001

CIN: U40101AS2003SGC007238 GSTIN: 18AAFCA4973J9Z3 PHONE: 0361-2739520 Web: www.aegcl.co.in